


LOW NOISE AUDIO AMPLIFIER APPLICATION.

FEATURES

- The FTC3200 is a transistor for low frequency and low noise applications. This device is designed to lower noise figure in the region of low signal source impedance, and to lower the pulse noise. This is recommended for the first stages of equalizer amplifiers.
- Low Noise
 - : $NF=4dB(Typ.)$, $R_g=100\Omega$, $V_{CE}=6V$, $I_C=100\mu A$, $f=1kHz$
 - : $NF=0.5dB(Typ.)$, $R_g=1k\Omega$, $V_{CE}=6V$, $I_C=100\mu A$, $f=1kHz$.
- Low Pulse Noise : Low 1/f Noise.
- High DC Current Gain : $h_{FE}=200\sim 700$.
- High Breakdown Voltage : $V_{CBO}=120V$.

MAXIMUM RATINGS ($T_a=25^\circ C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	120	V
Collector-Emitter Voltage	V_{CEO}	120	V
Emitter-Base Voltage	V_{EBO}	5	V
Collector Current	I_C	100	mA
Emitter Current	I_E	-100	mA
Collector Power Dissipation	P_C	625	mW
Junction Temperature	T_j	150	$^\circ C$
Storage Temperature Range	T_{stg}	-55 ~ 150	$^\circ C$

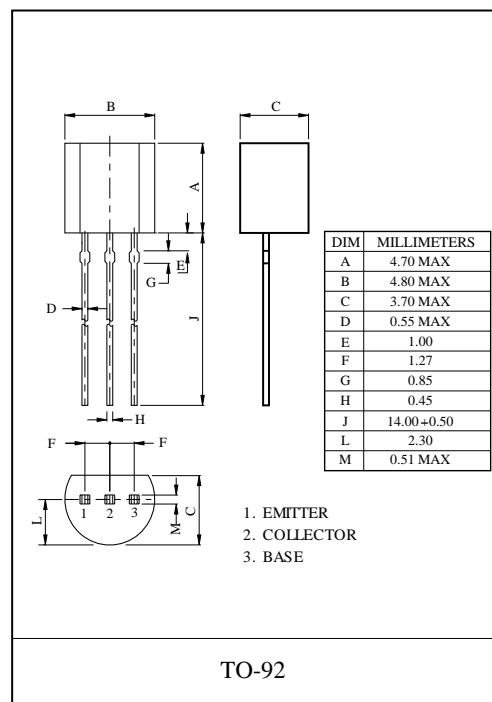


ELECTRICAL CHARACTERISTICS ($T_a=25^\circ C$)


CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB}=120V$, $I_E=0$	-	-	100	nA
Emitter Cut-off Current	I_{EBO}	$V_{EB}=5V$, $I_C=0$	-	-	100	nA
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=1mA$, $I_B=0$	120	-	-	V
DC Current Gain	$h_{FE}(Note)$	$V_{CE}=6V$, $I_C=2mA$	200	-	700	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=10mA$, $I_B=1mA$	-	-	0.3	V
Base-Emitter Voltage	V_{BE}	$V_{CE}=6V$, $I_C=2mA$	-	0.65	-	V
Transition Frequency	f_T	$V_{CE}=6V$, $I_C=1mA$	-	100	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=10V$, $I_E=0$, $f=1MHz$	-	3.0	-	pF
Noise Figure	NF	$V_{CE}=6V$, $I_C=100\mu A$, $f=10Hz$, $R_g=10k\Omega$	-	-	6.0	dB
		$V_{CE}=6V$, $I_C=100\mu A$, $f=1kHz$, $R_g=10k\Omega$	-	-	2.0	
		$V_{CE}=6V$, $I_C=100\mu A$, $f=1kHz$, $R_g=100\Omega$	-	4.0	-	

Note : h_{FE} Classification GR:200~400, BL:350~700


NF - R_g, I_C

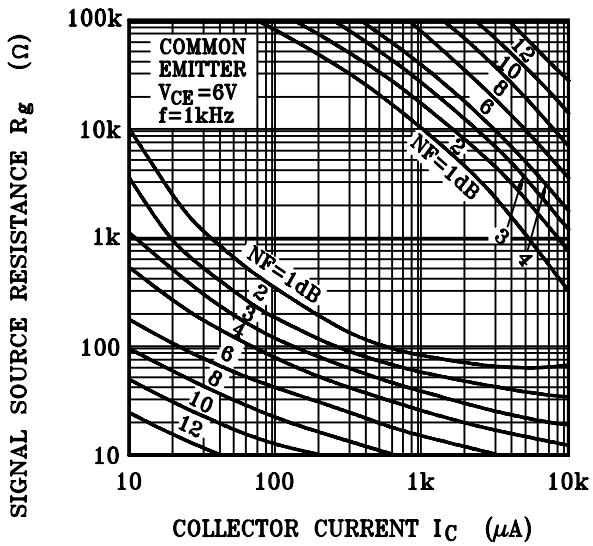


$h_{FE} - I_C$

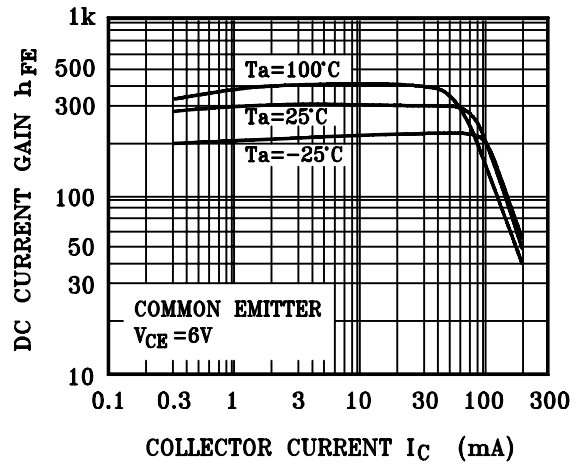

NF - R_g, I_C

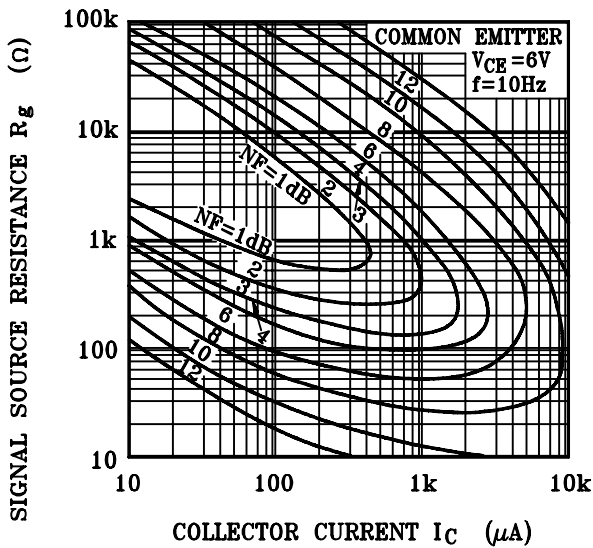

$C_{ob} - V_{CB}$

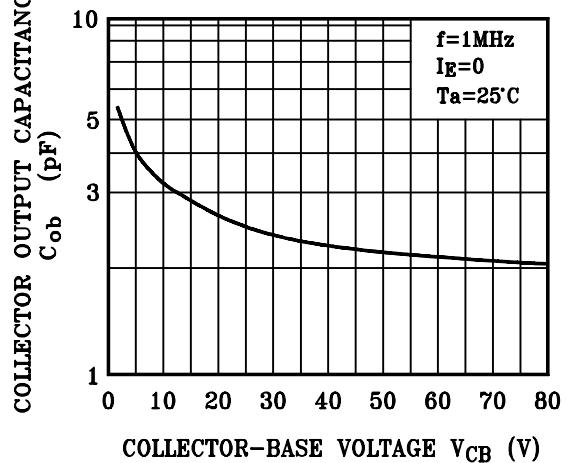

h PARAMETER - V_{CE}

