


Bias Resistor Transistor

NPN Silicon Surface Mount Transistor with Monolithic Bias Resistor Network


This new series of digital transistors is designed to replace a single device and its external resistor bias network. The BRT (Bias Resistor Transistor) contains a single transistor with a monolithic bias network resistor. The BRT eliminates these individual components by integrating them into a single device. The use of a BRT can reduce both system cost and board space.

- Simplifies Circuit Design
- Reduces Board Space and Component Count

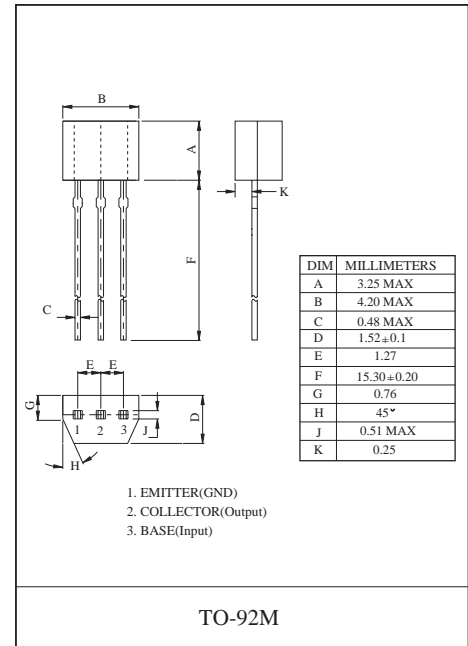

Absolute maximum ratings(Ta=25°C)

Parameter	Symbol	Value	Unit
Supply voltage	V_{CC}	-50	V
Input voltage	V_{IN}	-40~10	V
Output current	I_O	-30	mA
	$I_{C(MAX)}$	-100	
Power dissipation	P_d	300	mW
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-55~150	°C



Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ	Max.	Unit	Conditions
Input voltage	$V_{(off)}$	-0.5			V	$V_{CC}=-5V, I_o=-100\mu A$
	$V_{(on)}$			-3		$V_o=0.2V, I_o=-5mA$
Output voltage	$V_{O(on)}$			-0.3	V	$I_o/I_i=-10mA/-0.5mA$
Input current	I_i			-0.36	mA	$V_i=-5V$
Output current	$I_{O(off)}$			-0.5	μA	$V_{CC}=-50V, V_i=0$
DC current gain	G_I	56				$V_o=-5V, I_o=-5mA$
Input resistance	R_1	15.4	22	28.6	k Ω	
Resistance ratio	R_2/R_1	0.8	1	2		
Transition frequency	f_T		250		Mhz	$V_o=-10V, I_o=-5mA, f=100MHz$

Typical Characteristics

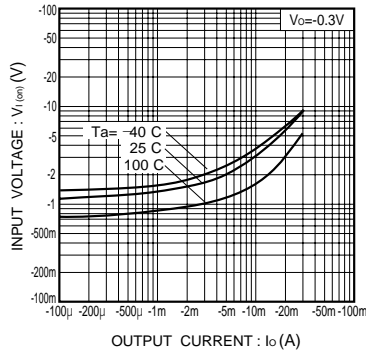


Fig.1 Input voltage vs. output current (ON characteristics)

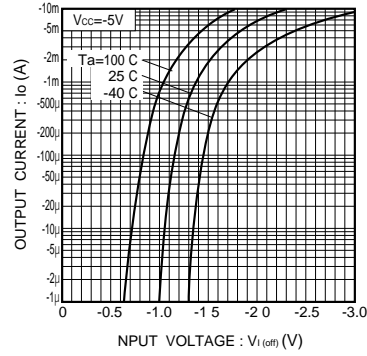


Fig.2 Output current vs. input voltage (OFF characteristics)

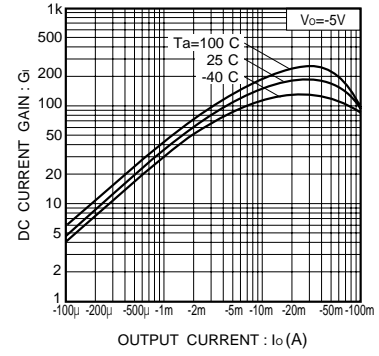


Fig.3 DC current gain vs. output current

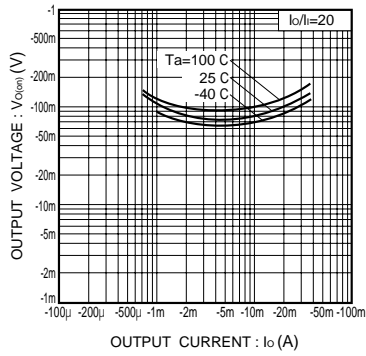


Fig.4 Output voltage vs. output current