

## 60V P-Channel MOSFETs


### General Description

These P-Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

### SOT-223 Pin Configuration



1. Gate  
2. Drain  
3. Source  
4. Drain

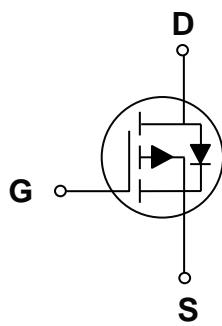

### Absolute Maximum Ratings ( $T_c=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Rating	Units
$V_{DS}$	Drain-Source Voltage	-60	V
$V_{GS}$	Gate-Source Voltage	$\pm 20$	V
$I_D$	Drain Current – Continuous ( $T_A=25^\circ\text{C}$ )	-3.2	A
	Drain Current – Continuous ( $T_A=70^\circ\text{C}$ )	-2.56	A
$I_{DM}$	Drain Current – Pulsed <sup>1</sup>	-12.8	A
EAS	Single Pulse Avalanche Energy <sup>2</sup>	25	mJ
IAS	Single Pulse Avalanche Current <sup>2</sup>	-18	A
$P_D$	Power Dissipation ( $T_A=25^\circ\text{C}$ )	2.02	W
	Power Dissipation – Derate above 25°C	0.02	W/°C
$T_{STG}$	Storage Temperature Range	-50 to 150	°C
$T_J$	Operating Junction Temperature Range	-50 to 150	°C

### Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction to ambient	---	62	°C/W
$R_{\theta JC}$	Thermal Resistance Junction to Case	---	23	°C/W



# FTK6909T

## 60V P-Channel MOSFETs

Electrical Characteristics ( $T_J=25^\circ\text{C}$ , unless otherwise noted)

### Off Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$ , $I_D=-250\mu\text{A}$	-60	---	---	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	$\text{BV}_{\text{DSS}}$ Temperature Coefficient	Reference to $25^\circ\text{C}$ , $I_D=-1\text{mA}$	---	-0.05	---	$\text{V}/\text{C}$
$I_{\text{DSS}}$	Drain-Source Leakage Current	$V_{\text{DS}}=-60\text{V}$ , $V_{\text{GS}}=0\text{V}$ , $T_J=25^\circ\text{C}$	---	---	-1	$\mu\text{A}$
		$V_{\text{DS}}=-48\text{V}$ , $V_{\text{GS}}=0\text{V}$ , $T_J=125^\circ\text{C}$	---	---	-10	$\mu\text{A}$
$I_{\text{GSS}}$	Gate-Source Leakage Current	$V_{\text{GS}}=\pm 20\text{V}$ , $V_{\text{DS}}=0\text{V}$	---	---	$\pm 100$	$\text{nA}$

### On Characteristics

$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance	$V_{\text{GS}}=-10\text{V}$ , $I_D=-3\text{A}$	---	87	105	$\text{m}\Omega$
		$V_{\text{GS}}=-4.5\text{V}$ , $I_D=-2\text{A}$	---	120	145	$\text{m}\Omega$
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{GS}}=V_{\text{DS}}$ , $I_D=-250\mu\text{A}$	-1.0	-1.6	-2.5	V
			---	3	---	$\text{mV}/\text{C}$
$g_{\text{fs}}$	Forward Transconductance	$V_{\text{DS}}=-10\text{V}$ , $I_D=-3\text{A}$	---	5.5	---	S

### Dynamic and switching Characteristics

$Q_g$	Total Gate Charge <sup>3, 4</sup>	$V_{\text{DS}}=-30\text{V}$ , $V_{\text{GS}}=-10\text{V}$ , $I_D=-2\text{A}$	---	10	15	nC
$Q_{\text{gs}}$	Gate-Source Charge <sup>3, 4</sup>		---	1.6	3.2	
$Q_{\text{gd}}$	Gate-Drain Charge <sup>3, 4</sup>		---	3	6	
$T_{\text{d(on)}}$	Turn-On Delay Time <sup>3, 4</sup>	$V_{\text{DD}}=-30\text{V}$ , $V_{\text{GS}}=-10\text{V}$ , $R_G=6\Omega$	---	8	16	ns
$T_r$	Rise Time <sup>3, 4</sup>		---	15.4	30	
$T_{\text{d(off)}}$	Turn-Off Delay Time <sup>3, 4</sup>		---	42.8	80	
$T_f$	Fall Time <sup>3, 4</sup>		---	8.4	16	
$C_{\text{iss}}$	Input Capacitance	$V_{\text{DS}}=-30\text{V}$ , $V_{\text{GS}}=0\text{V}$ , $F=1\text{MHz}$	---	785	1300	pF
$C_{\text{oss}}$	Output Capacitance		---	175	300	
$C_{\text{rss}}$	Reverse Transfer Capacitance		---	112	220	
$R_g$	Gate resistance	$V_{\text{GS}}=0\text{V}$ , $V_{\text{DS}}=0\text{V}$ , $F=1\text{MHz}$	---	36	---	$\Omega$

### Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$I_s$	Continuous Source Current	$V_G=V_D=0\text{V}$ , Force Current	---	---	-3.2	A
			---	---	-6.4	A
$I_{\text{SM}}$	Pulsed Source Current					
$V_{\text{SD}}$	Diode Forward Voltage	$V_{\text{GS}}=0\text{V}$ , $I_s=-1\text{A}$ , $T_J=25^\circ\text{C}$	---	---	-1	V

Note :

- Repetitive Rating : Pulsed width limited by maximum junction temperature.
- $V_{\text{DD}}=25\text{V}$ ,  $V_{\text{GS}}=-10\text{V}$ ,  $L=0.1\text{mH}$ ,  $I_{\text{AS}}=-18\text{A}$ ,  $R_G=25\Omega$ , Starting  $T_J=25^\circ\text{C}$ .
- The data tested by pulsed, pulse width  $\leq 300\text{us}$ , duty cycle  $\leq 2\%$ .
- Essentially independent of operating temperature.

## 60V P-Channel MOSFETs

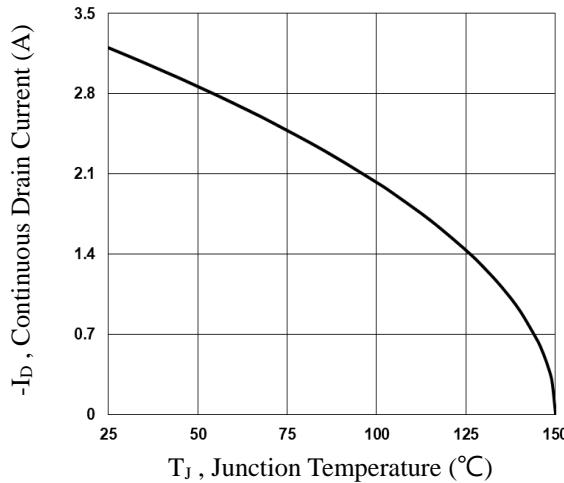


Fig.1 Continuous Drain Current vs. T<sub>J</sub>

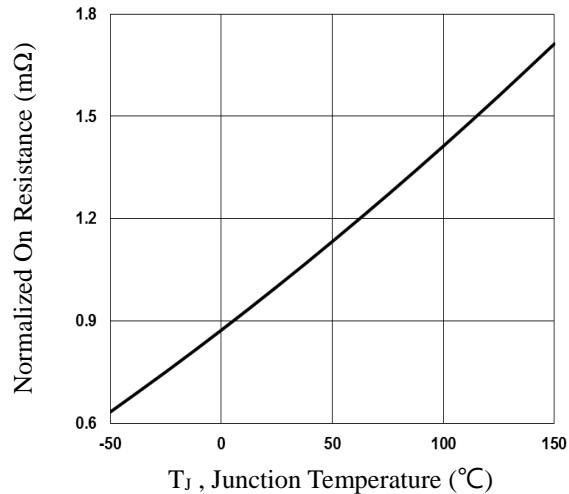


Fig.2 Normalized RDS(on) vs. T<sub>J</sub>

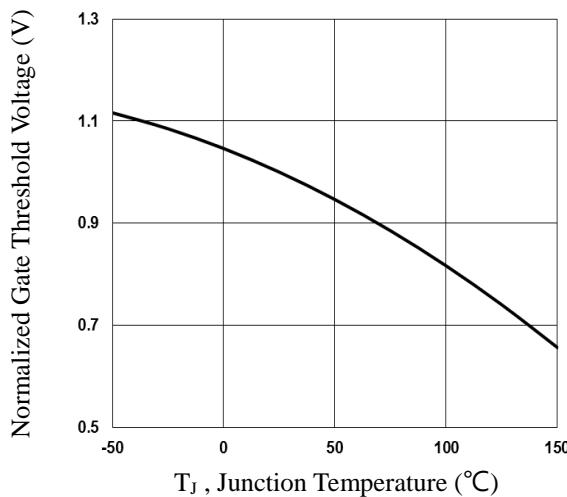


Fig.3 Normalized V<sub>th</sub> vs. T<sub>J</sub>

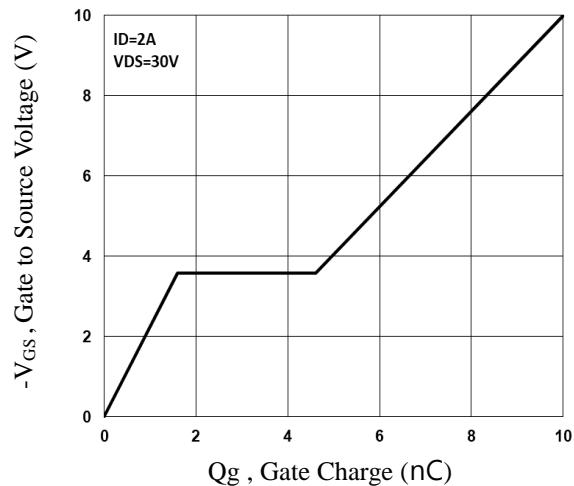


Fig.4 Gate Charge Waveform

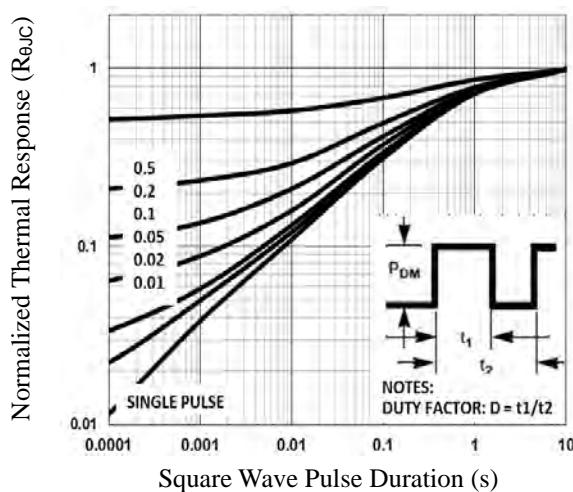


Fig.5 Normalized Transient Impedance

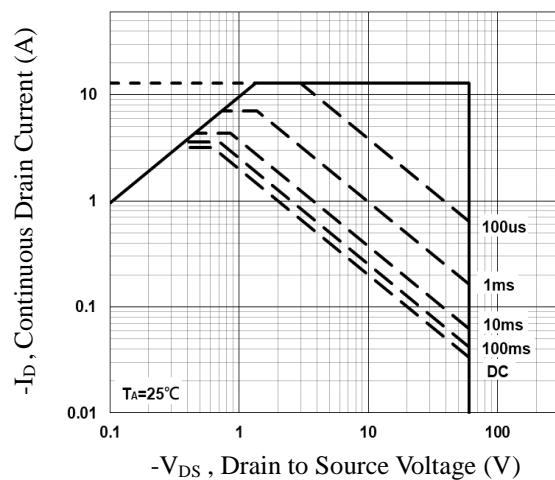


Fig.6 Maximum Safe Operation Area

## 60V P-Channel MOSFETs

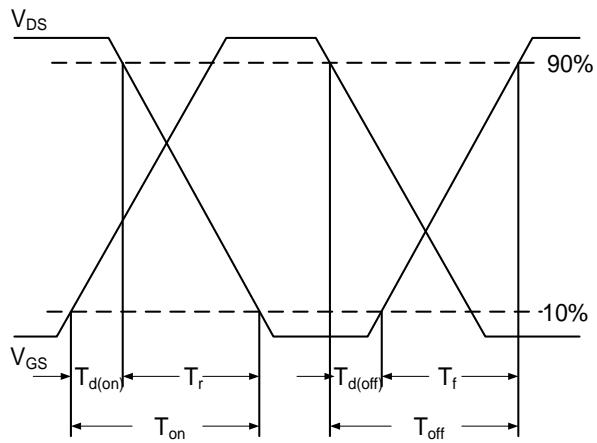


Fig.7 Switching Time Waveform


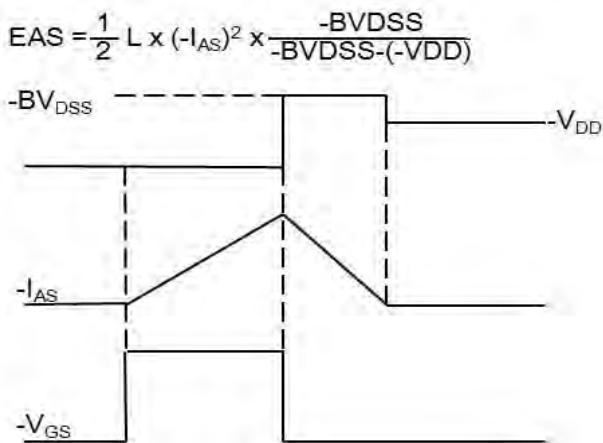


Fig.8 EAS Waveform

## 60V P-Channel MOSFETs

### SOT-223 PACKAGE INFORMATION

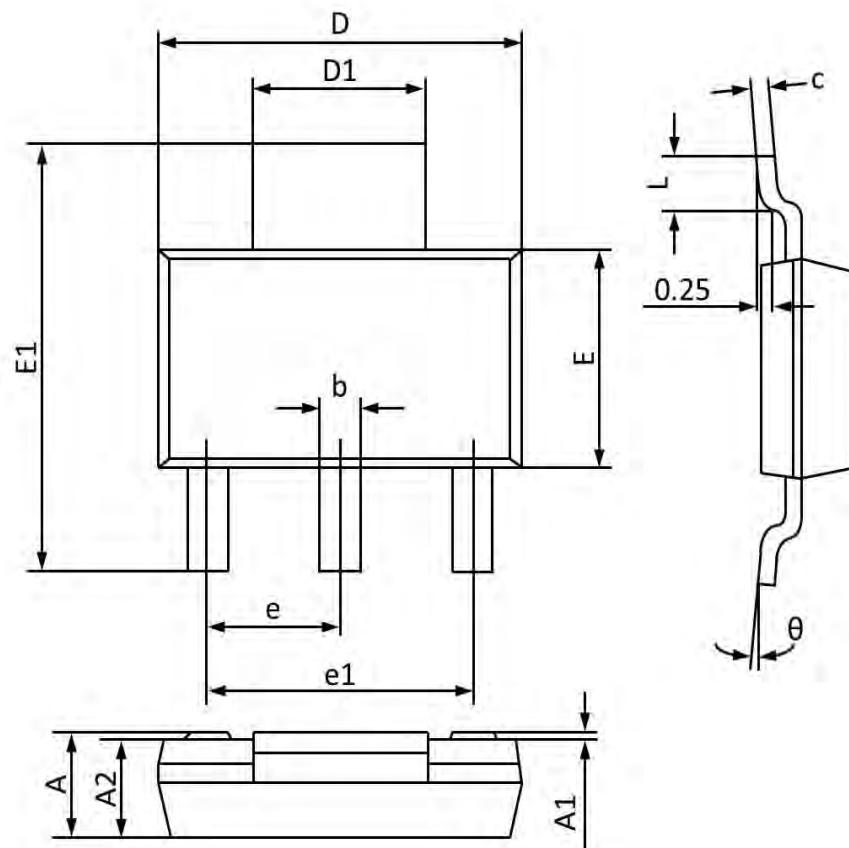

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MAX	MIN	MAX	MIN
A	1.800	1.520	0.071	0.060
A1	0.100	0.000	0.004	0.000
A2	1.700	1.500	0.067	0.059
b	0.820	0.660	0.032	0.026
c	0.350	0.250	0.014	0.010
D	6.400	6.200	0.252	0.244
D1	3.100	2.900	0.122	0.114
E	3.700	3.300	0.146	0.130
E1	7.070	6.830	0.278	0.269
e	2.30(BSC)		0.091(BSC)	
e1	4.700	4.500	0.185	0.177
L	1.150	0.900	0.045	0.035
θ	10°	0°	10°	0°