



60V N-Channel MOSFETs

General Description

These N-Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

TO-252 Pin Configuration



BVDSS	RDS(ON)	ID
60V	6mΩ	75A

Features

- 60V, 75A, RDS(ON) = 6mΩ @ VGS = 10V
- Improved dv/dt capability
- Fast switching
- 100% EAS Guaranteed
- Green Device Available

Applications

- Motor Drive
- Power Tools
- LED Lighting
- Quick Charger

Absolute Maximum Ratings (Tc=25°C unless otherwise noted)

Symbol	Parameter	Rating	Units
V _{DS}	Drain-Source Voltage	60	V
V _{GS}	Gate-Source Voltage	± 20	V
I _D	Drain Current – Continuous (Tc=25 °C)	75	A
	Drain Current – Continuous (Tc=100 °C)	47	A
I _{DM}	Drain Current – Pulsed ¹	300	A
EAS	Single Pulse Avalanche Energy ²	181	mJ
I _{AS}	Single Pulse Avalanche Current ²	60.1	A
P _D	Power Dissipation (Tc=25 °C)	101	W
	Power Dissipation – Derate above 25 °C	0.81	W/°C
T _{STG}	Storage Temperature Range	-55 to 150	°C
T _J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
R _{θJA}	Thermal Resistance Junction to ambient	---	62	°C/W
R _{θJC}	Thermal Resistance Junction to Case	---	1.23	°C/W



FTK6960D

60V N-Channel MOSFETs

Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)

Off Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$, $I_D=250\mu\text{A}$	60	---	---	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	BV_{DSS} Temperature Coefficient	Reference to 25°C , $I_D=1\text{mA}$	---	0.036	---	$\text{V}/^\circ\text{C}$
$I_{\text{DS}(\text{S})}$	Drain-Source Leakage Current	$V_{\text{DS}}=60\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=25^\circ\text{C}$	---	---	1	μA
		$V_{\text{DS}}=48\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=125^\circ\text{C}$	---	---	10	μA
I_{GS}	Gate-Source Leakage Current	$V_{\text{GS}}=\pm 20\text{V}$, $V_{\text{DS}}=0\text{V}$	---	---	± 100	nA

On Characteristics

$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance ³	$V_{\text{GS}}=10\text{V}$, $I_D=30\text{A}$	---	5.1	6	$\text{m}\Omega$
		$V_{\text{GS}}=4.5\text{V}$, $I_D=20\text{A}$	---	5.9	7.5	$\text{m}\Omega$
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{GS}}=V_{\text{DS}}$, $I_D = 250\mu\text{A}$	1.2	1.6	2.5	V
			---	-5.08	---	$\text{mV}/^\circ\text{C}$
g_{fs}	Forward Transconductance	$V_{\text{DS}}=10\text{V}$, $I_D=3\text{A}$	---	15	---	S

Dynamic and switching Characteristics

Q_g	Total Gate Charge ^{3, 4}	$V_{\text{DS}}=30\text{V}$, $V_{\text{GS}}=4.5\text{V}$, $I_D=10\text{A}$	---	32.8	65	nC
Q_{gs}	Gate-Source Charge ^{3, 4}		---	10.8	20	
Q_{gd}	Gate-Drain Charge ^{3, 4}		---	11.6	22	
$T_{\text{d(on)}}$	Turn-On Delay Time ^{3, 4}	$V_{\text{DD}}=15\text{V}$, $V_{\text{GS}}=10\text{V}$, $R_G=3.3\Omega$ $I_D=1\text{A}$	---	20	40	ns
T_r	Rise Time ^{3, 4}		---	14.2	28	
$T_{\text{d(off)}}$	Turn-Off Delay Time ^{3, 4}		---	61.2	122	
T_f	Fall Time ^{3, 4}		---	16.8	34	
C_{iss}	Input Capacitance		---	4740	7110	pF
C_{oss}	Output Capacitance	$V_{\text{DS}}=25\text{V}$, $V_{\text{GS}}=0\text{V}$, $F=1\text{MHz}$	---	325	488	
C_{rss}	Reverse Transfer Capacitance		---	161	332	
R_g	Gate resistance	$V_{\text{GS}}=0\text{V}$, $V_{\text{DS}}=0\text{V}$, $F=1\text{MHz}$	---	1.6	---	Ω

Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_s	Continuous Source Current	$V_G=V_D=0\text{V}$, Force Current	---	---	75	A
			---	---	150	A
V_{SD}	Diode Forward Voltage ³	$V_{\text{GS}}=0\text{V}$, $I_s=1\text{A}$, $T_J=25^\circ\text{C}$	---	---	1	V

Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. $V_{\text{DD}}=25\text{V}$, $V_{\text{GS}}=10\text{V}$, $L=0.1\text{mH}$, $I_{\text{AS}}=60.1\text{A}$, $R_G=25\Omega$, Starting $T_J=25^\circ\text{C}$.
3. The data tested by pulsed, pulse width $\leq 300\text{us}$, duty cycle $\leq 2\%$.
4. Essentially independent of operating temperature.

60V N-Channel MOSFETs

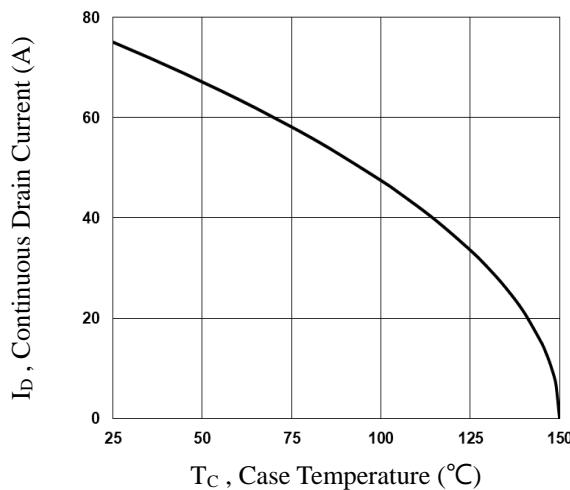


Fig.1 Continuous Drain Current vs. T_C

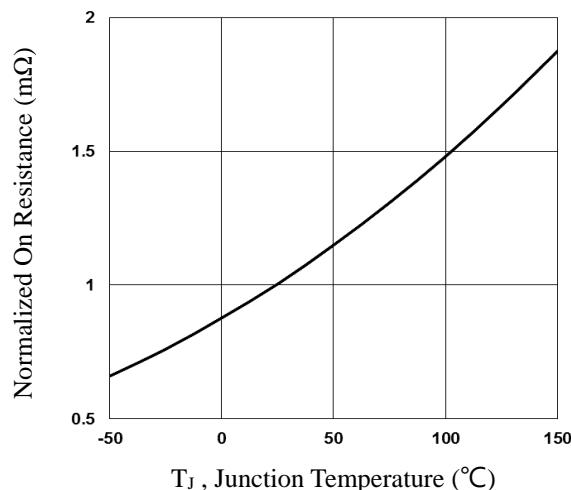


Fig.2 Normalized $R_{DS(on)}$ vs. T_J

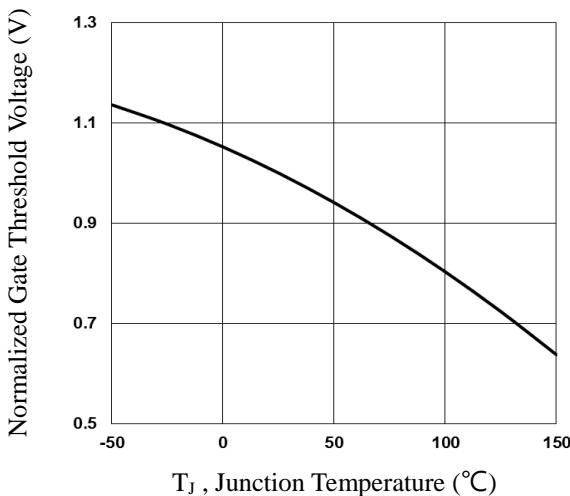


Fig.3 Normalized V_{th} vs. T_J

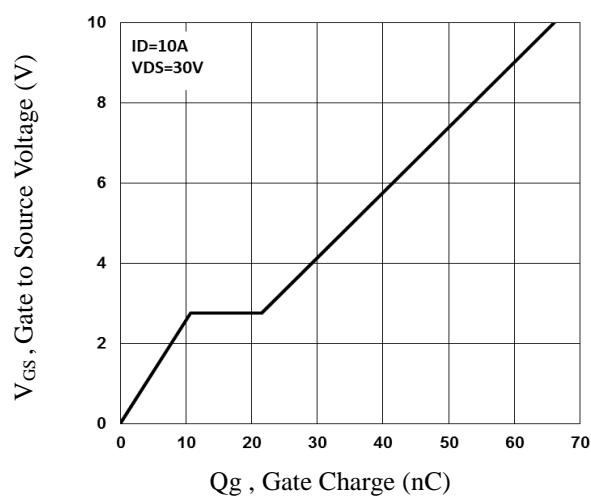


Fig.4 Gate Charge Waveform

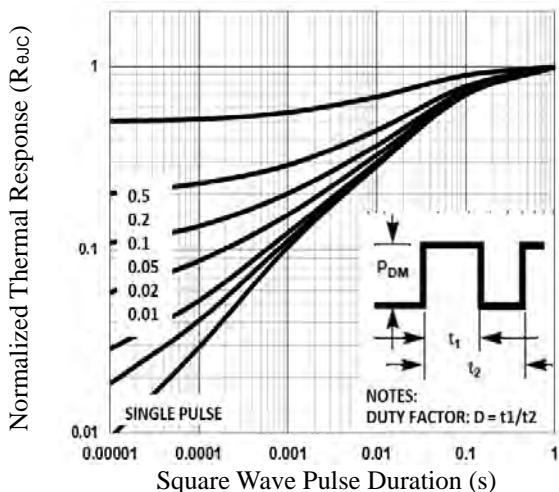


Fig.5 Normalized Transient Response

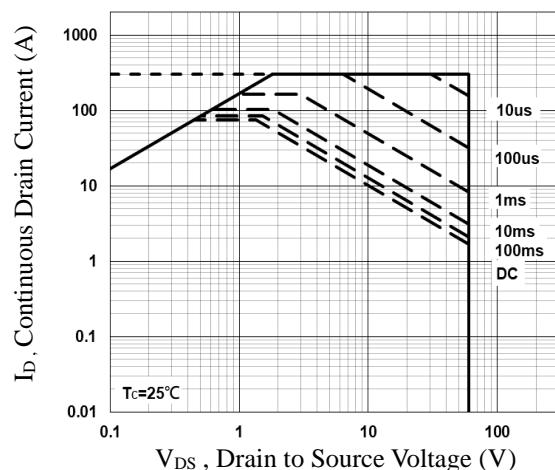


Fig.6 Maximum Safe Operation Area

60V N-Channel MOSFETs

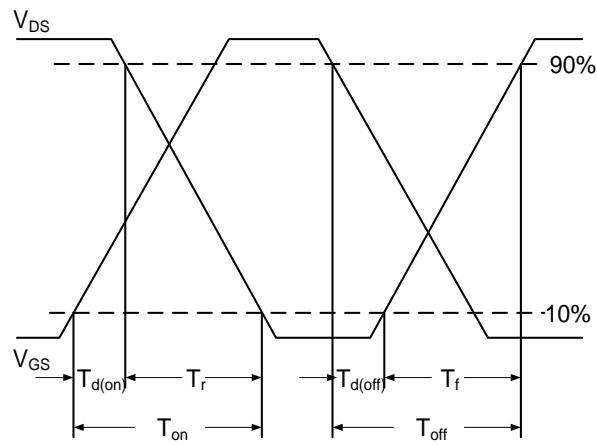


Fig.7 Switching Time Waveform


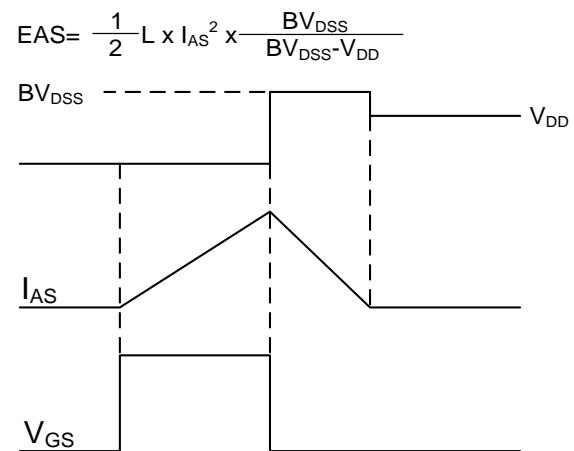


Fig.8 EAS Waveform

60V N-Channel MOSFETs

TO-252 PACKAGE INFORMATION

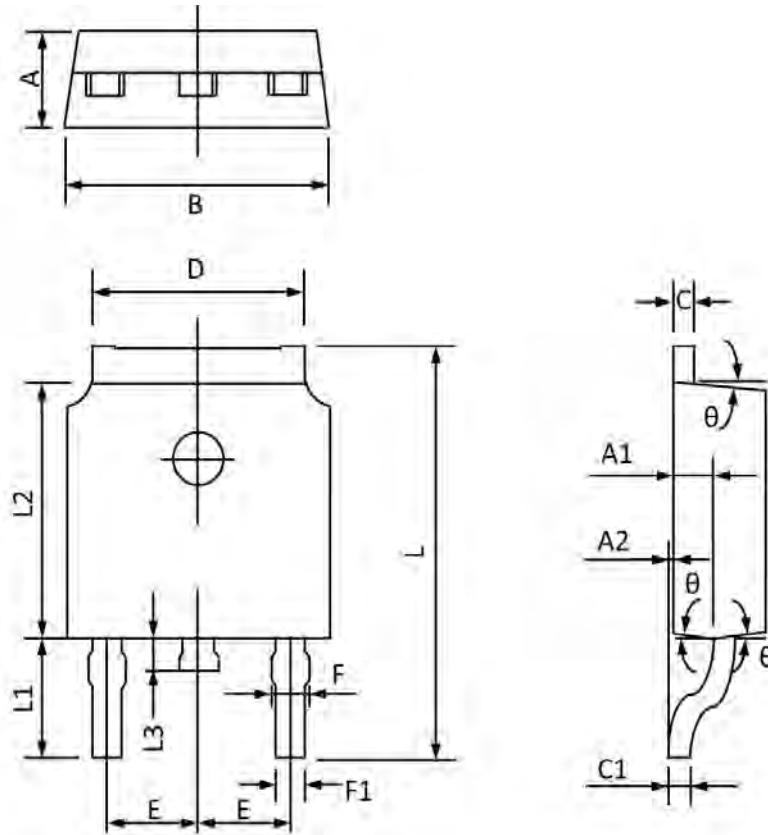

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MAX	MIN	MAX	MIN
A	2.400	2.200	0.094	0.087
A1	1.110	0.910	0.044	0.036
A2	0.150	0.000	0.006	0.000
B	6.800	6.400	0.268	0.252
C	0.580	0.450	0.023	0.018
C1	0.580	0.460	0.023	0.018
D	5.500	5.100	0.217	0.201
E	2.386	2.186	0.094	0.086
F	0.940	0.600	0.037	0.024
F1	0.860	0.500	0.034	0.020
L	10.400	9.400	0.409	0.370
L1	3.000	2.400	0.118	0.094
L2	6.200	5.400	0.244	0.213
L3	1.200	0.600	0.047	0.024
θ	9°	3°	9°	3°