


## 60V N-Channel MOSFETs

### General Description

These N-Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

### TO-263 Pin Configuration

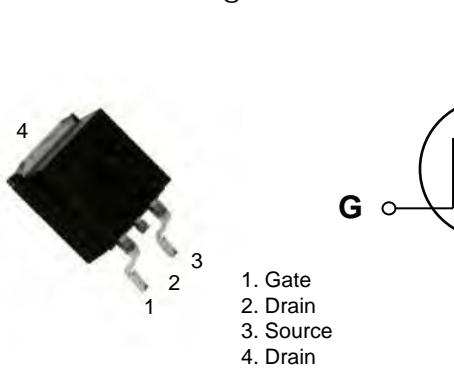

BVDSS	RDS(ON)	ID
60V	8.5mΩ	85A

### Features

- 60V, 85A, RDS(ON) = 8.5mΩ @ VGS = 10V
- Improved dv/dt capability
- Fast switching
- 100% EAS Guaranteed
- Green Device Available

### Applications

- Networking
- Load Switch
- LED applications

### Absolute Maximum Ratings (Tc=25 °C unless otherwise noted)

Symbol	Parameter	Rating	Units
VDS	Drain-Source Voltage	60	V
VGS	Gate-Source Voltage	±25	V
I <sub>D</sub>	Drain Current – Continuous (T <sub>c</sub> =25°C)	85	A
	Drain Current – Continuous (T <sub>c</sub> =100°C)	54	A
I <sub>DM</sub>	Drain Current – Pulsed <sup>1</sup>	340	A
EAS	Single Pulse Avalanche Energy <sup>2</sup>	238	mJ
IAS	Single Pulse Avalanche Current <sup>2</sup>	69	A
P <sub>D</sub>	Power Dissipation (T <sub>c</sub> =25°C)	113	W
	Power Dissipation – Derate above 25°C	0.90	W/°C
T <sub>STG</sub>	Storage Temperature Range	-50 to 150	°C
T <sub>J</sub>	Operating Junction Temperature Range	-50 to 150	°C

### Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
R <sub>θJA</sub>	Thermal Resistance Junction to ambient	---	62	°C/W
R <sub>θJC</sub>	Thermal Resistance Junction to Case	---	1.1	°C/W



# FTK6966ADD

## 60V N-Channel MOSFETs

Electrical Characteristics ( $T_J=25^\circ\text{C}$ , unless otherwise noted)

### Off Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$ , $I_D=250\mu\text{A}$	60	---	---	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	$\text{BV}_{\text{DSS}}$ Temperature Coefficient	Reference to $25^\circ\text{C}$ , $I_D=1\text{mA}$	---	0.05	---	$\text{V}/^\circ\text{C}$
$I_{\text{DSS}}$	Drain-Source Leakage Current	$V_{\text{DS}}=60\text{V}$ , $V_{\text{GS}}=0\text{V}$ , $T_J=25^\circ\text{C}$	---	---	1	$\mu\text{A}$
		$V_{\text{DS}}=48\text{V}$ , $V_{\text{GS}}=0\text{V}$ , $T_J=125^\circ\text{C}$	---	---	10	$\mu\text{A}$
$I_{\text{GSS}}$	Gate-Source Leakage Current	$V_{\text{GS}}=\pm 25\text{V}$ , $V_{\text{DS}}=0\text{V}$	---	---	$\pm 100$	$\text{nA}$

### On Characteristics

$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance	$V_{\text{GS}}=10\text{V}$ , $I_D=20\text{A}$	---	7	8.5	$\text{m}\Omega$
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{GS}}=V_{\text{DS}}$ , $I_D = 250\mu\text{A}$	2.0	3.0	4.0	V
$\Delta V_{\text{GS(th)}}$	$V_{\text{GS(th)}}$ Temperature Coefficient		---	-5	---	$\text{mV}/^\circ\text{C}$
$g_{\text{fs}}$	Forward Transconductance	$V_{\text{DS}}=10\text{V}$ , $I_D=3\text{A}$	---	10	---	S

### Dynamic and switching Characteristics

$Q_g$	Total Gate Charge <sup>3,4</sup>	$V_{\text{DS}}=30\text{V}$ , $V_{\text{GS}}=10\text{V}$ , $I_D=10\text{A}$	---	26.9	48	nC
$Q_{\text{gs}}$	Gate-Source Charge <sup>3,4</sup>		---	10.7	20	
$Q_{\text{gd}}$	Gate-Drain Charge <sup>3,4</sup>		---	6.55	13	
$T_{\text{d(on)}}$	Turn-On Delay Time <sup>3,4</sup>	$V_{\text{DD}}=30\text{V}$ , $V_{\text{GS}}=10\text{V}$ , $R_G=6\Omega$	---	16	30	ns
$T_r$	Rise Time <sup>3,4</sup>		---	12	24	
$T_{\text{d(off)}}$	Turn-Off Delay Time <sup>3,4</sup>		---	32	55	
$T_f$	Fall Time <sup>3,4</sup>		---	23	40	
$C_{\text{iss}}$	Input Capacitance	$V_{\text{DS}}=30\text{V}$ , $V_{\text{GS}}=0\text{V}$ , $F=1\text{MHz}$	---	1690	2600	pF
$C_{\text{oss}}$	Output Capacitance		---	294	450	
$C_{\text{rss}}$	Reverse Transfer Capacitance		---	90	180	
$R_g$	Gate resistance	$V_{\text{GS}}=0\text{V}$ , $V_{\text{DS}}=0\text{V}$ , $F=1\text{MHz}$	---	1.3	2.5	$\Omega$

### Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
$I_s$	Continuous Source Current	$V_G=V_D=0\text{V}$ , Force Current	---	---	85	A
$I_{\text{SM}}$	Pulsed Source Current		---	---	170	A
$V_{\text{SD}}$	Diode Forward Voltage	$V_{\text{GS}}=0\text{V}$ , $I_s=1\text{A}$ , $T_J=25^\circ\text{C}$	---	---	1	V

Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2.  $V_{\text{DD}}=25\text{V}$ ,  $V_{\text{GS}}=10\text{V}$ ,  $L=0.1\text{mH}$ ,  $I_{\text{AS}}=69\text{A}$ , Starting  $T_J=25^\circ\text{C}$
3. The data tested by pulsed , pulse width  $\leq 300\text{us}$  , duty cycle  $\leq 2\%$ .
4. Essentially independent of operating temperature.

## 60V N-Channel MOSFETs

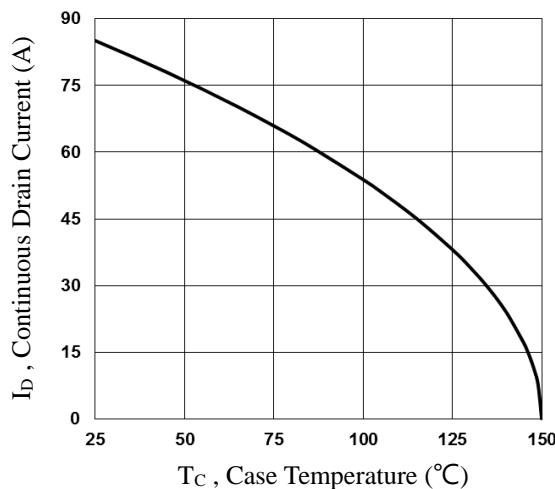


Fig.1 Continuous Drain Current vs.  $T_C$

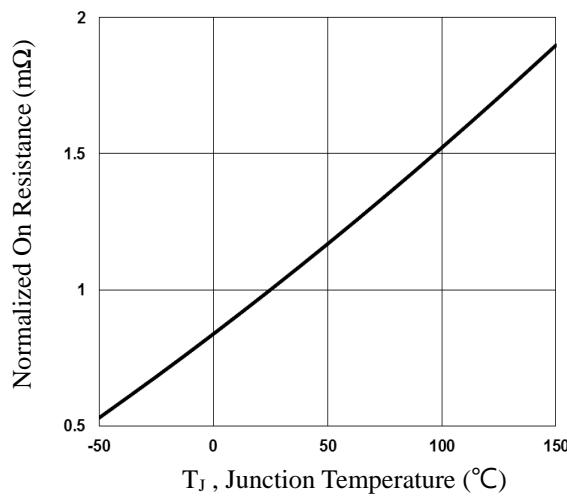


Fig.2 Normalized  $R_{DS(on)}$  vs.  $T_J$

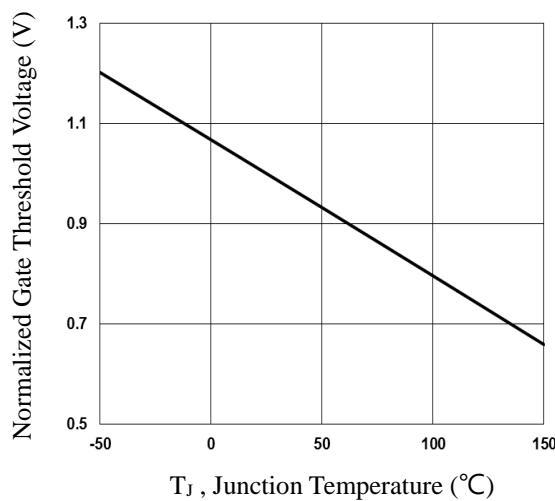


Fig.3 Normalized  $V_{GS(th)}$  vs.  $T_J$

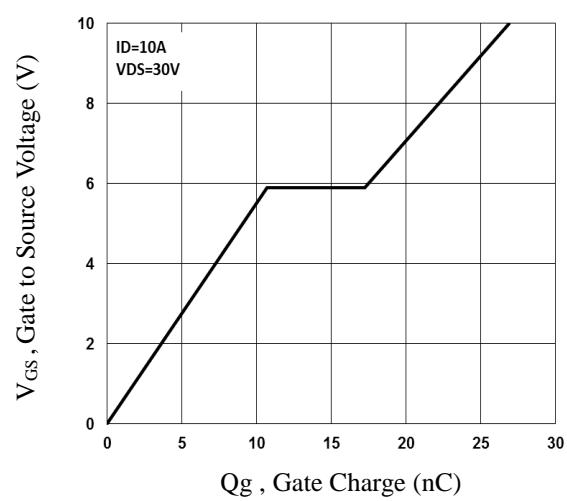


Fig.4 Gate Charge Characteristics

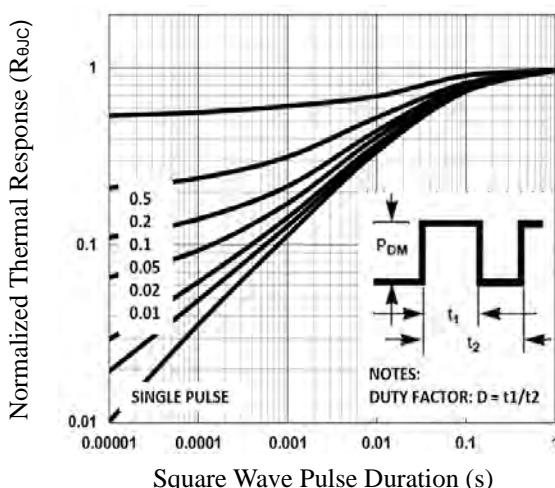


Fig.5 Normalized Transient Impedance

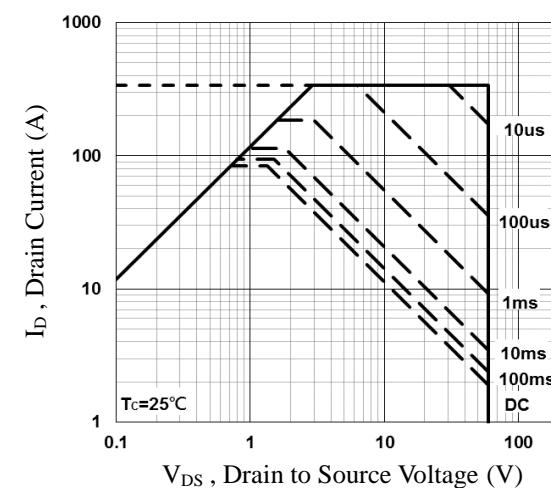


Fig.6 Maximum Safe Operation Area

## 60V N-Channel MOSFETs

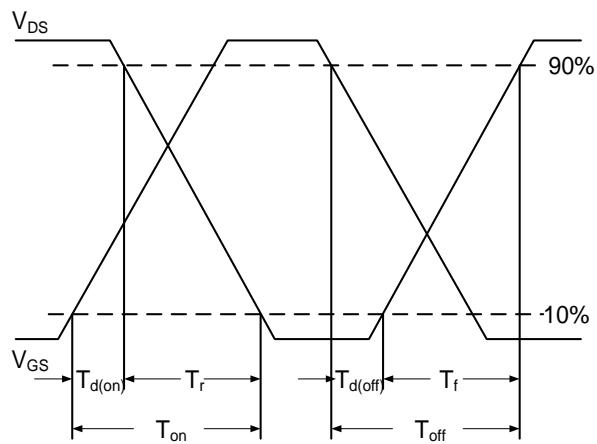


Fig.7 Switching Time Waveform

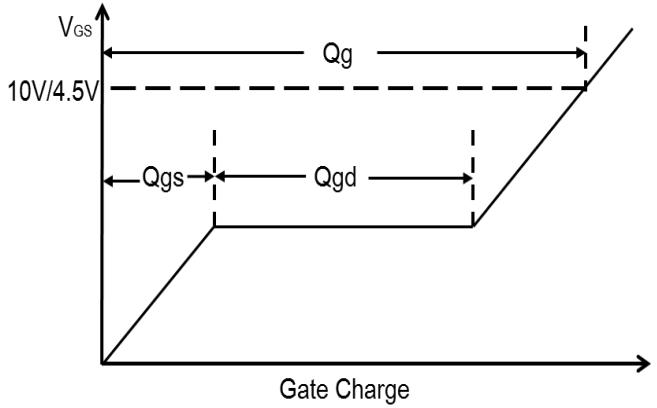


Fig.8 Gate Charge Waveform

## 60V N-Channel MOSFETs

## TO-263 PACKAGE INFORMATION

