


100V N-Channel MOSFETs

General Description

These N-Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

PPAK5X6 Pin Configuration

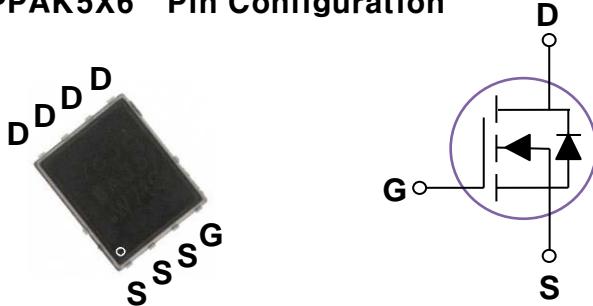

BVDSS	RDS(ON)	ID
100V	9mΩ	62A

Features

- 100V, 62A, RDS(ON) = 9mΩ @ VGS = 10V
- Improved dv/dt capability
- Fast switching
- 100% EAS Guaranteed
- Green Device Available

Applications

- Networking
- Load Switch
- LED applications
- Quick Charger

Absolute Maximum Ratings $T_c=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Rating	Units
V _{DS}	Drain-Source Voltage	100	V
V _{GS}	Gate-Source Voltage	+20 / -12	V
I _D	Drain Current – Continuous ($T_c=25^\circ\text{C}$) (Chip Limitation)	62	A
	Drain Current – Continuous ($T_c=100^\circ\text{C}$) (Chip Limitation)	39.2	A
I _{DM}	Drain Current – Pulsed ¹	248	A
EAS	Single Pulse Avalanche Energy ²	211	mJ
IAS	Single Pulse Avalanche Current ²	65	A
P _D	Power Dissipation ($T_c=25^\circ\text{C}$)	125	W
	Power Dissipation – Derate above 25°C	1	W/°C
T _{STG}	Storage Temperature Range	-55 to 150	°C
T _J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
R _{JA}	Thermal Resistance Junction to ambient	---	62	°C/W
R _{JC}	Thermal Resistance Junction to Case	---	1	°C/W

Electrical Characteristics (T_J=25 °C, unless otherwise noted)

Off Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	100	---	---	V
△BV _{DSS} /△T _J	BV _{DSS} Temperature Coefficient	Reference to 25°C, I _D =1mA	---	0.054	---	V/°C
I _{DSS}	Drain-Source Leakage Current	V _{DS} =100V, V _{GS} =0V, T _J =25°C	---	---	1	uA
		V _{DS} =80V, V _{GS} =0V, T _J =85°C	---	---	10	uA
I _{GSS}	Gate-Source Leakage Current	V _{GS} =+20V, V _{DS} =0V	---	---	100	nA

On Characteristics

R _{DSON}	Static Drain-Source On-Resistance	V _{GS} =10V, I _D =15A	---	7.2	9	mΩ
		V _{GS} =10V, I _D =15A(T _J =125°C)	---	11.8	---	mΩ
		V _{GS} =4.5V, I _D =8A	---	10.8	14	mΩ
V _{GS(th)}	Gate Threshold Voltage	V _{GS} =V _{DS} , I _D =250μA	1.2	1.6	2.5	V
△V _{GS(th)}	V _{GS(th)} Temperature Coefficient		---	-5.5	---	mV/°C
g _f	Forward Transconductance	V _{DS} =10V, I _D =3A	---	11	---	S

Dynamic and switching Characteristics

Q _g	Total Gate Charge ^{3, 4}	V _{DS} =50V, V _{GS} =10V, I _D =8.5A	---	37.8	76	nC
Q _{gs}	Gate-Source Charge ^{3, 4}		---	7.8	16	
Q _{gd}	Gate-Drain Charge ^{3, 4}		---	8.4	17	
T _{d(on)}	Turn-On Delay Time ^{3, 4}	V _{DD} =50V, V _{GS} =10V, R _G =6Ω I _D =1A	---	14.6	30	ns
T _r	Rise Time ^{3, 4}		---	21.5	44	
T _{d(off)}	Turn-Off Delay Time ^{3, 4}		---	54	108	
T _f	Fall Time ^{3, 4}		---	84.3	168	
C _{iss}	Input Capacitance	V _{DS} =50V, V _{GS} =0V, F=1MHz	---	2250	4500	pF
C _{oss}	Output Capacitance		---	410	820	
C _{rss}	Reverse Transfer Capacitance		---	25	50	
R _g	Gate resistance	V _{GS} =0V, V _{DS} =0V, F=1MHz	---	1.43	---	Ω

Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I _s	Continuous Source Current	V _G =V _D =0V, Force Current	---	---	62	A
I _{SM}	Pulsed Source Current		---	---	124	A
V _{SD}	Diode Forward Voltage	V _{GS} =0V, I _s =1A, T _J =25°C	---	---	1	V
t _{rr}	Reverse Recovery Time	V _{GS} =0V, I _s =10A, di/dt=100A/μs	---	49.2	---	ns
Q _{rr}	Reverse Recovery Charge	T _J =25°C	---	75.1	---	nC

Note :

- Repetitive Rating : Pulsed width limited by maximum junction temperature.
- V_{DD}=50V, V_{GS}=10V, L=0.1mH, I_{AS}=65A., R_G=25Ω, Starting T_J=25°C.
- The data tested by pulsed, pulse width ≤ 300us, duty cycle ≤ 2%.
- Essentially independent of operating temperature.

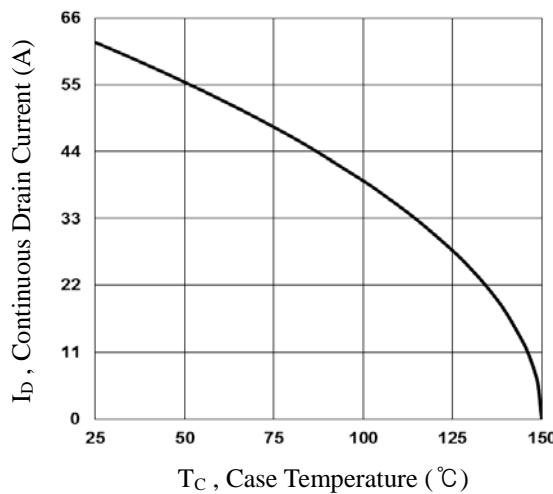


Fig.1 Continuous Drain Current vs. T_c


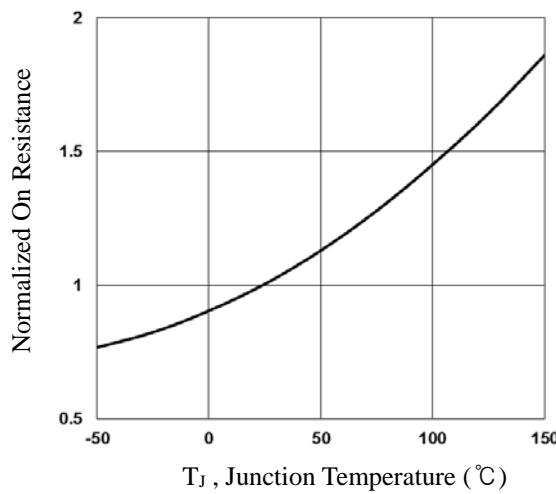


Fig.2 Normalized $R_{DS(on)}$ vs. T_j

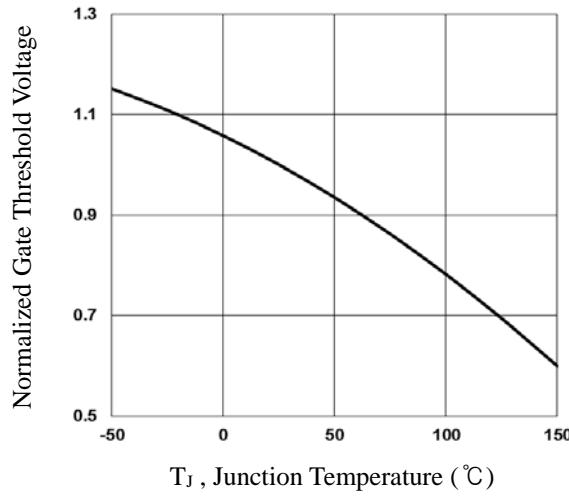

Normalized V_{th} vs. T_j

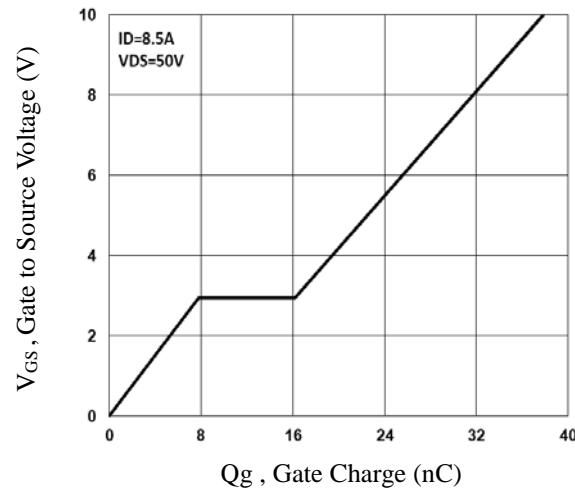


Fig.4 Gate Charge Characteristics

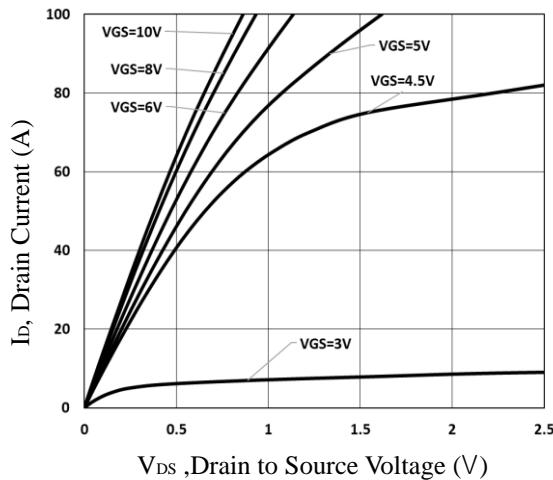


Fig.5 Typical Output Characteristics

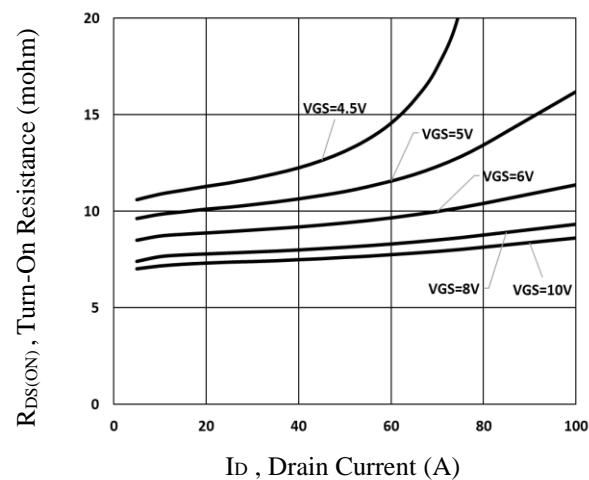


Fig.6 Turn-On Resistance vs. I_d

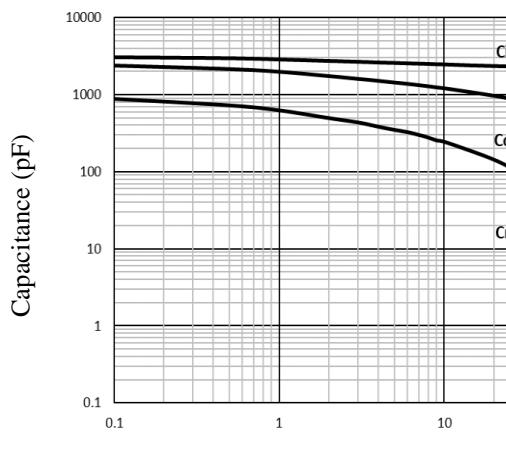


Fig.7 Capacitance Characteristics

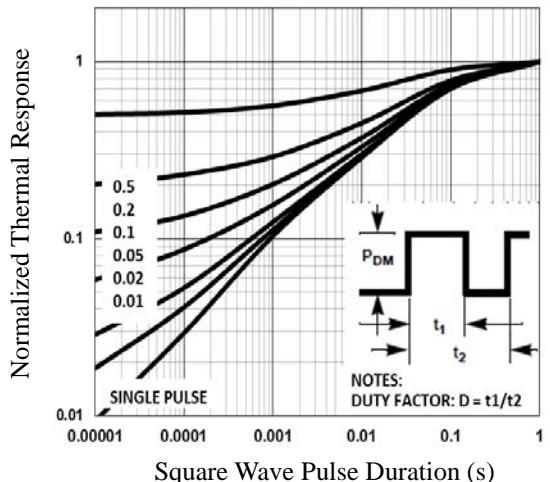


Fig.8 Normalized Transient Impedance

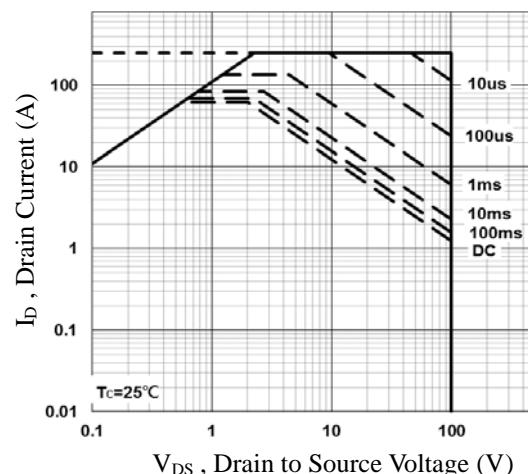


Fig.9 Maximum Safe Operation Area

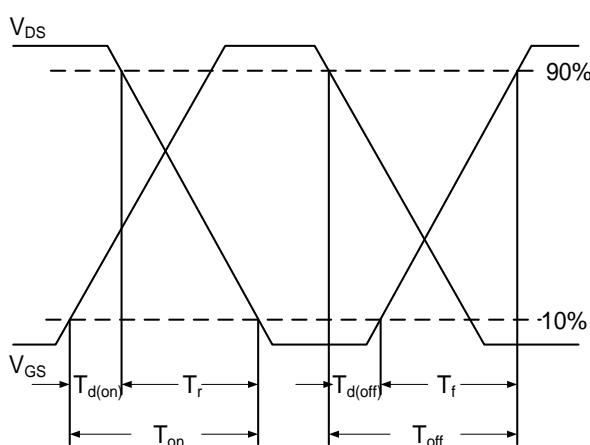


Fig.10 Switching Time Waveform


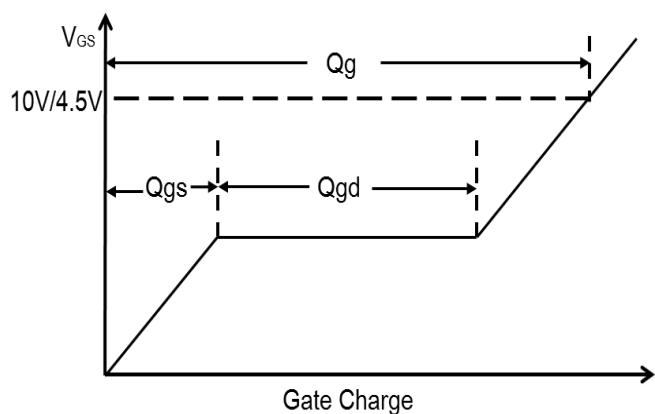


Fig.11 Gate Charge Waveform

PPAK5x6 PACKAGE INFORMATION

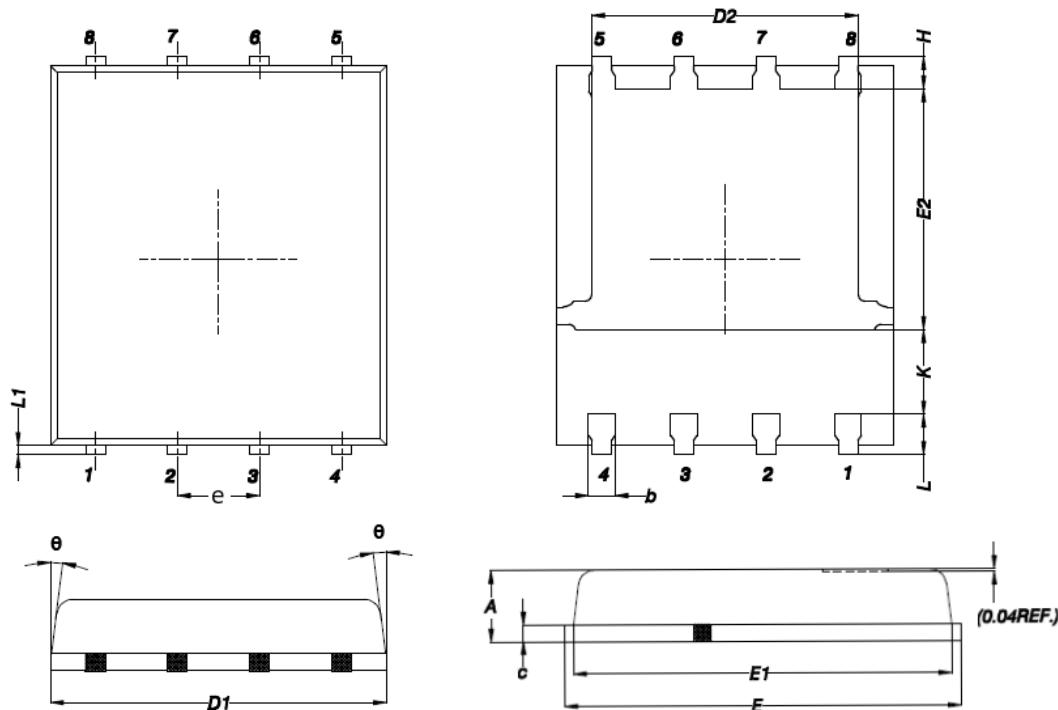

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MAX	MIN	MAX	MIN
A	1.200	0.850	0.047	0.031
b	0.510	0.330	0.020	0.013
C	0.300	0.200	0.012	0.008
D1	5.400	4.800	0.212	0.189
D2	4.310	3.610	0.170	0.142
E	6.300	5.850	0.248	0.230
E1	5.960	5.450	0.235	0.215
E2	3.920	3.300	0.154	0.130
e	1.27BSC		0.05BSC	
H	0.650	0.380	0.026	0.015
K	---	1.100	---	0.043
L	0.710	0.380	0.028	0.015
L1	0.250	0.050	0.009	0.002
θ	12°	0°	12°	0°