

600V N-Channel MOS FETs

General Description


These N-Channel enhancement mode power field effect transistors are planar stripe, DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency switch mode power supply

BVDSS	RDS(on)	ID
600V	160Ω	0.1A

Features

- Improved dv/dt capability
- Fast switching
- Green Device Available

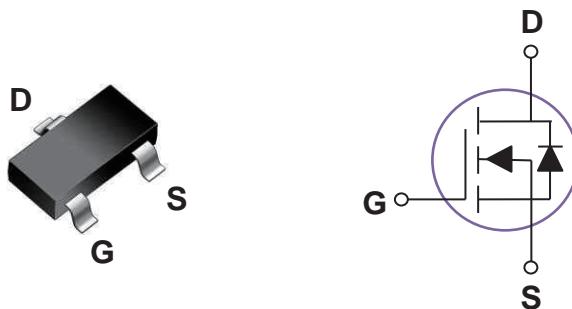SOT23-3S Pin Configuration



Applications

- High efficient switched mode power supplies
- TV Power
- Adapter/charger
- LED Lighting

Absolute Maximum Ratings $T_c=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	600	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Drain Current – Continuous ($T_c=25^\circ\text{C}$)	0.1	A
	Drain Current – Continuous ($T_c=100^\circ\text{C}$)	0.06	A
I_{DM}	Drain Current – Pulsed ¹	0.4	A
P_D	Power Dissipation ($T_c=25^\circ\text{C}$)	1.56	W
	Power Dissipation – Derate above 25°C	0.012	W/°C
T_{STG}	Storage Temperature Range	-55 to 150	°C
T_J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction to ambient	---	80	°C/W



FTK001N60S

Electrical Characteristics ($T_J=25^\circ\text{C}$)

Off Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$, $I_{\text{D}}=250\mu\text{A}$	600	---	---	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	BV_{DSS} Temperature Coefficient	Reference to 25°C , $I_{\text{D}}=1\text{mA}$	---	0.52	---	$\text{V}/^\circ\text{C}$
I_{DSS}	Drain-Source Leakage Current	$V_{\text{DS}}=600\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=25^\circ\text{C}$	---	---	1	μA
		$V_{\text{DS}}=480\text{V}$, $V_{\text{GS}}=0\text{V}$, $T_J=125^\circ\text{C}$	---	---	10	μA
I_{GSS}	Gate-Source Leakage Current	$V_{\text{GS}}=\pm 20\text{V}$, $V_{\text{DS}}=0\text{V}$	---	---	± 100	nA

On Characteristics

$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance	$V_{\text{GS}}=10\text{V}$, $I_{\text{D}}=0.1\text{A}$	---	90	160	Ω
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{GS}}=V_{\text{DS}}$, $I_{\text{D}}=250\mu\text{A}$	1.5	2.3	3	V
$\Delta V_{\text{GS}(\text{th})}$	$V_{\text{GS}(\text{th})}$ Temperature Coefficient		---	-3.74	---	$\text{mV}/^\circ\text{C}$
g_{fs}	Forward Transconductance	$V_{\text{DS}}=10\text{V}$, $I_{\text{D}}=0.07\text{A}$	---	0.7	---	S

Dynamic and switching Characteristics

Q_g	Total Gate Charge ^{2,3}	$V_{\text{DS}}=480\text{V}$, $V_{\text{GS}}=10\text{V}$, $I_{\text{D}}=0.1\text{A}$	---	2.4	5	nC
Q_{gs}	Gate-Source Charge ^{2,3}		---	0.3	1	
Q_{gd}	Gate-Drain Charge ^{2,3}		---	0.2	1	
$T_{\text{d}(\text{on})}$	Turn-On Delay Time ^{2,3}	$V_{\text{DD}}=300\text{V}$, $V_{\text{GS}}=10\text{V}$, $R_{\text{G}}=3.3\text{k}\Omega$	---	9.2	18	ns
T_r	Rise Time ^{2,3}		---	12.2	24	
$T_{\text{d}(\text{off})}$	Turn-Off Delay Time ^{2,3}		---	14.4	28	
T_f	Fall Time ^{2,3}		---	76.8	150	
C_{iss}	Input Capacitance	$V_{\text{DS}}=25\text{V}$, $V_{\text{GS}}=0\text{V}$, $F=1\text{MHz}$	---	32.8	65	pF
C_{oss}	Output Capacitance		---	9.7	20	
C_{rss}	Reverse Transfer Capacitance		---	2	4	

Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_s	Continuous Source Current	$V_G=V_D=0\text{V}$, Force Current	---	---	0.1	A
I_{SM}	Pulsed Source Current		---	---	0.4	A
V_{SD}	Diode Forward Voltage	$V_{\text{GS}}=0\text{V}$, $I_s=0.1\text{A}$, $T_J=25^\circ\text{C}$	---	---	1	V

Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. The data tested by pulsed , pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.
3. Essentially independent of operating temperature.

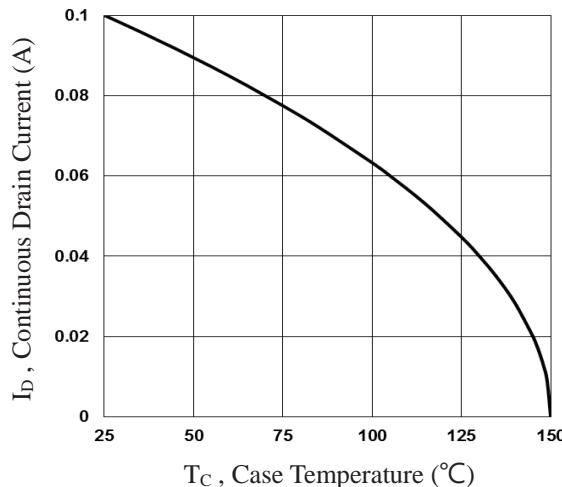
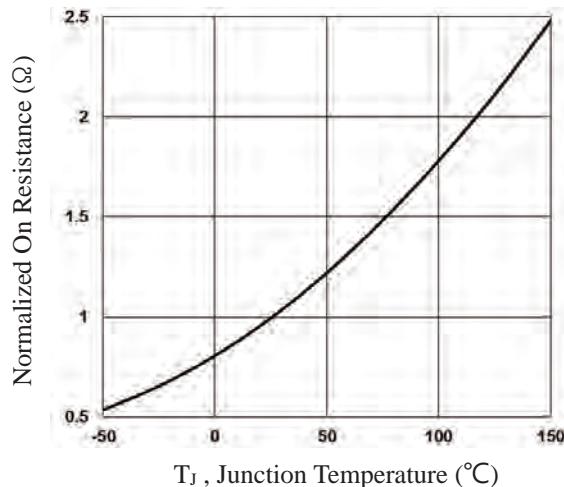
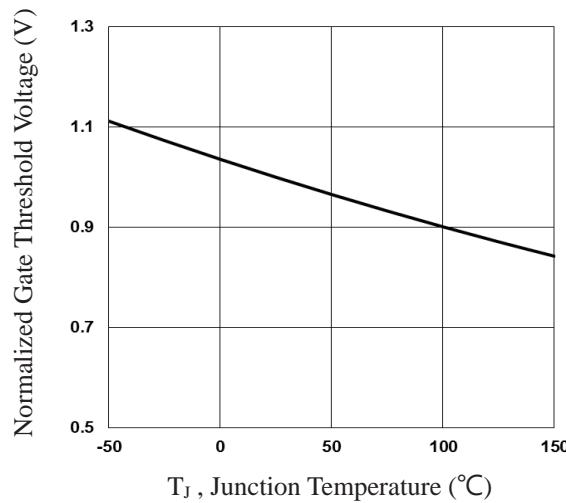
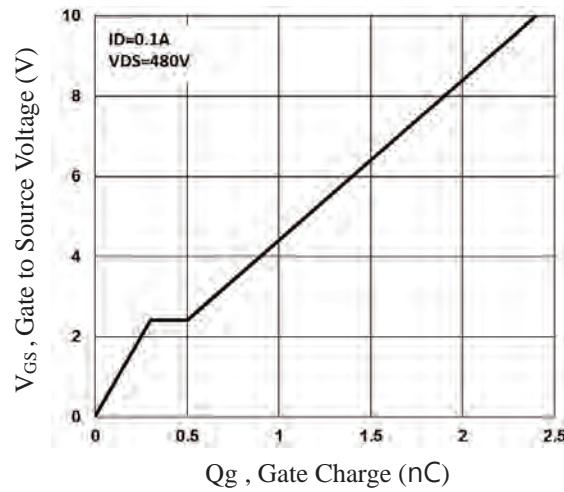
ELECTRICAL CHARACTERISTICS CURVES

 Fig.1 Continuous Drain Current vs. T_C

 Fig.2 Normalized RD_{SON} vs. T_J

 Fig.3 Normalized V_{th} vs. T_J


Fig.4 Gate Charge Waveform

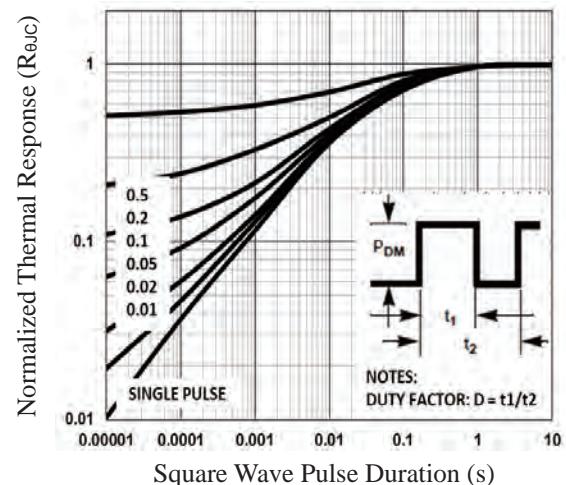


Fig.5 Normalized Transient Impedance

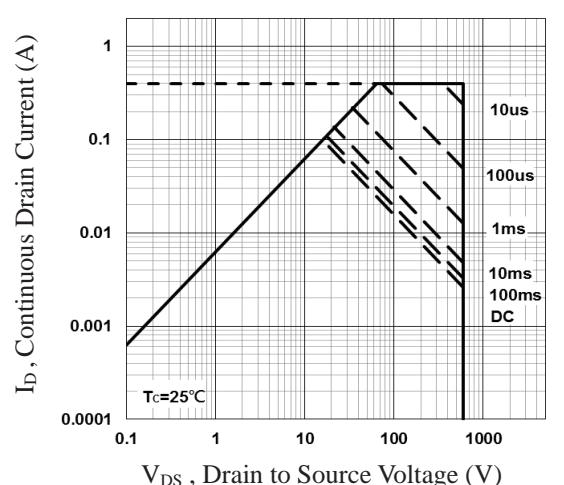


Fig.6 Maximum Safe Operation Area

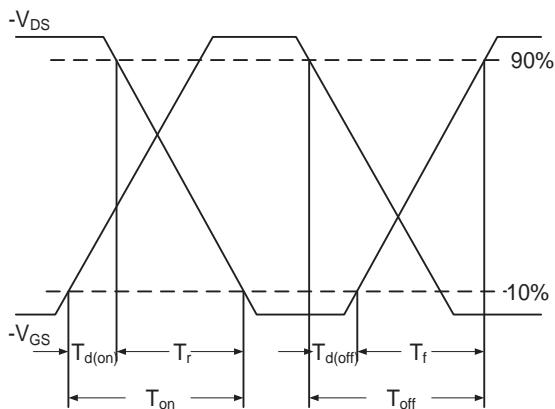
ELECTRICAL CHARACTERISTICS CURVES (Con.)


Fig.7 Switching Time Waveform


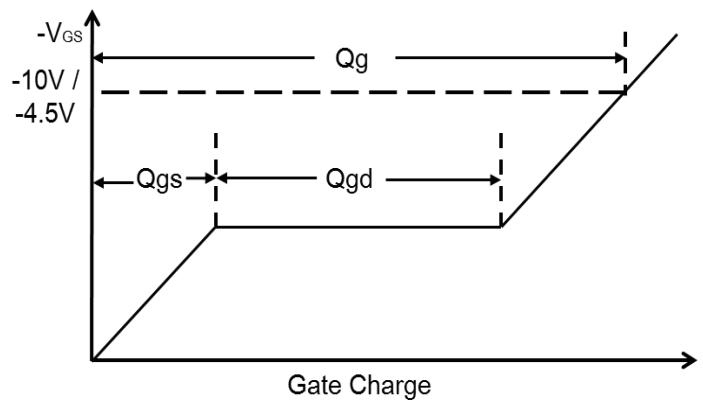


Fig.8 Gate Charge Waveform

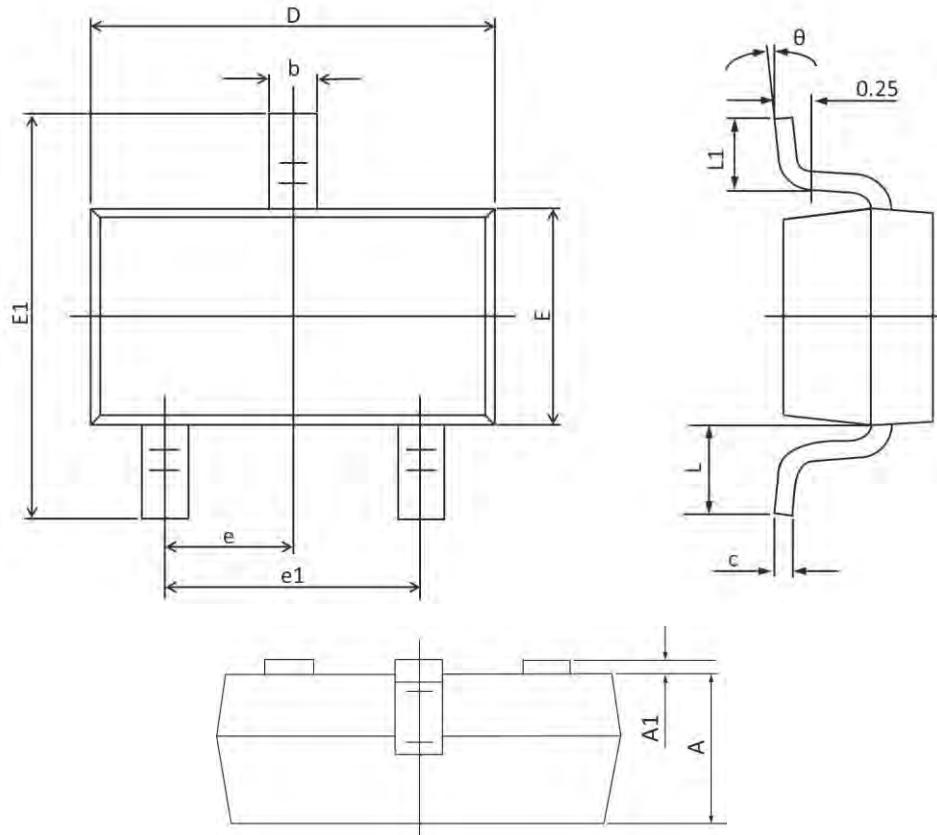

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.000	0.035	0.039
A1	0.000	0.100	0.000	0.004
b	0.300	0.500	0.012	0.020
c	0.090	0.110	0.003	0.004
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020
θ	1°	7°	1°	7°