



GLASS PASSIVATED CHIP SINGLE-PHASE BRIDGE RECTIFIER



Reverse Voltage - 50 to 1000 Volts Forward Current 4.0 Amperes

Features

- ◆ Ideal for printed circuit boards
- ◆ High surge current capability
- ◆ High case dielectric strength of 2000 V_{RMS}
- ◆ Glass passivated chip junction
- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0

Mechanical Data

- ◆ Case: KBJ(3S)
Epoxy meets UL-94V-0 Flammability rating
- ◆ Terminals: Plated leads solderable per MIL-STD-750, Method 2026
- ◆ High temperature soldering guaranteed:
260°C/10 seconds, 0.375 (9.5mm) lead length, 5lbs.(2.3kg) tension
- ◆ Polarity: As marked on body
- ◆ Mounting Torque: 10 cm-kg (8.8 inches-lbs) max.
- ◆ Recommended Torque: 5.7 cm-kg (5 inches-lbs)

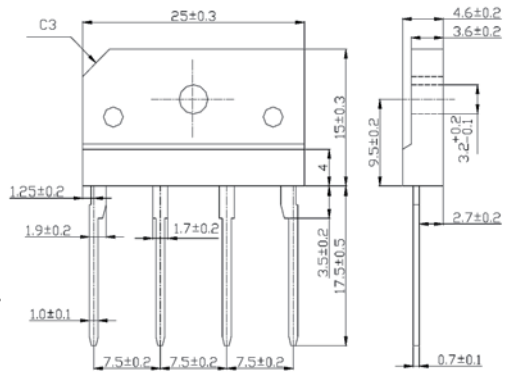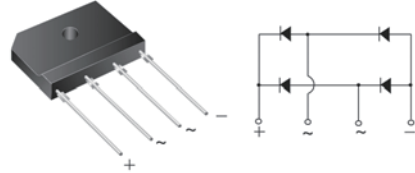

Package outline dimensions in millimeters

Typical Applications

General purpose use in ac-to-dc bridge full wave rectification for Monitor, TV, Printer, Switching Mode Power Supply, Adapter, Audio equipment, and Home Appliances applications

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Parameter	Symbols	KBJ4005	KBJ401	KBJ402	KBJ404	KBJ406	KBJ408	KBJ410	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified output current at T _C =100°C T _A =25°C	I _{F(AV)}				4.0 ⁽¹⁾				Amps
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}				135				Amps
Rating for fusing (t<8.3ms)	I ² t				75.6				A ² sec
Maximum instantaneous forward voltage drop per leg at 2.0A	V _F				1.0				Volt
Maximum DC reverse current at rated DC blocking voltage per leg T _A =25°C T _A =125°C	I _R				5.0 250.0				µA
Typical thermal resistance per leg	R _{θJA} R _{θJC}				26 ⁽²⁾ 5 ⁽¹⁾				°C/W
Dielectric strength (Terminals to case, AC 1 minute)	V _{ISO}				2000				Volts
Operating junction and storage temperature range	T _J , T _{STG}				-55 to +150				°C

- Notes:**
1. Unit case mounted on 6.3x6.3x0.15cm thick Al plate heatsink.
 2. Units mounted on P.C.B. with 0.5 x 0.5" (13 x 13 mm) copper pads and 0.375" (9.5 mm) lead length
 3. Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw



RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

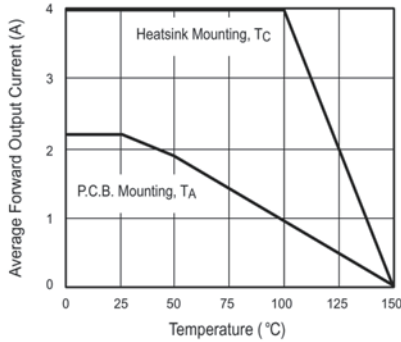


Figure 1. Derating Curve Output Rectified Current

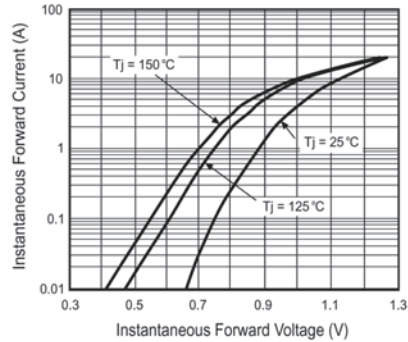


Figure 3. Typical Forward Characteristics Per Leg

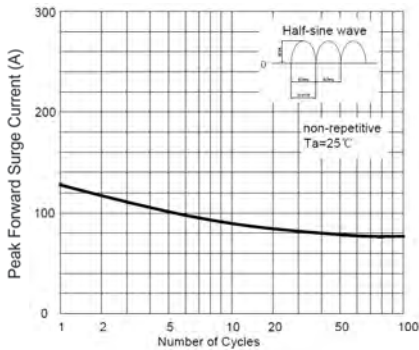


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

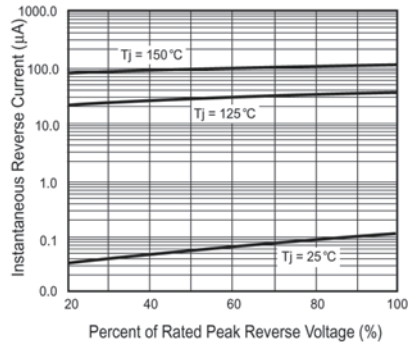


Figure 4. Typical Reverse Characteristics Per Leg

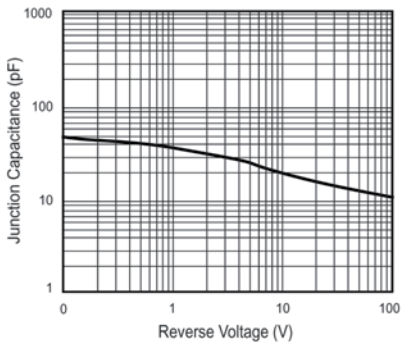


Figure 5. Typical Junction Capacitance Per Leg

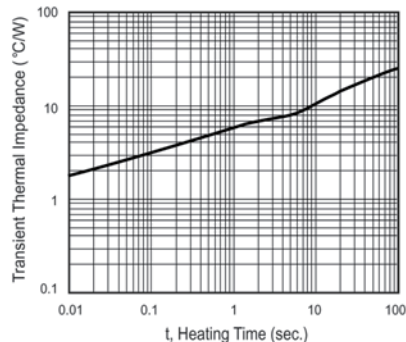


Figure 6. Typical Transient Thermal Impedance Per Leg