


## Single Phase 6.0Amp Glass passivated Bridge Rectifiers

### Features

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Idea for printed circuit board
- Glass passivated Junction chip
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed  
250°C/10 seconds at terminals

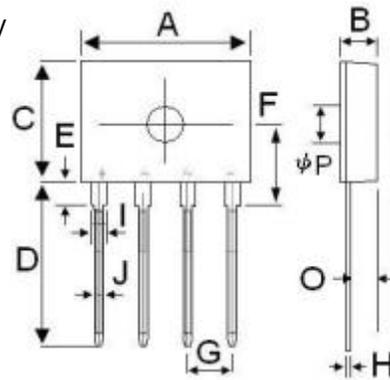


D3K		
Dim.	Min.	Max.
A	14.2	14.7
B	3.30	3.60
C	10.2	10.6
D	13.8	14.4
E	1.8	2.2
F	6.65	7.25
G	3.71	3.91
H	0.3	0.55
I	1.22	1.42
J	0.76	0.86
O	1.8	2.4
P	3.0Φ	3.4Φ

All Dimensions in millimeter

### Mechanical Data

- Case :** Molded plastic body  
**Terminals :** Solder plated, solderable per MIL-STD-750, Method 2026  
**Polarity :** Polarity symbol marking on body  
**Mounting Position :** Any

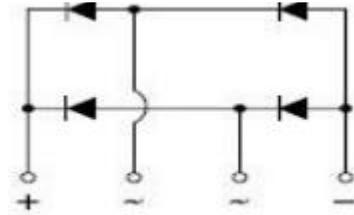

### Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	D6K B05	D6K B10	D6K B20	D6K B40	D6K B60	D6K B80	D6K B100	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	v
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	v
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	v
Maximum average forward rectified current with heatsink	$I_{(AV)}$	6.0							A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	175.0							A
Rating for fusing (t=8.3ms, Ta=25°C)	$I^2t$	127.093							A <sup>2</sup> s
Maximum instantaneous forward voltage at 3.0A	$V_F$	1.10							v
Maximum DC reverse current T <sub>A</sub> =25°C at rated DC blocking voltage T <sub>A</sub> =125°C	$I_R$	5.0 500							uA
Typical junction capacitance (Note 1)	$C_J$	56.0							pF
Typical thermal resistance	$R_{qJA}$	55.0							°C/W
Operating junction and storage temperature range	$T_J, T_{STG}$	-55 to +150							°C

**Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

## Single Phase 6.0Amp Glass passivated Bridge Rectifiers

### Ratings And Characteristic Curves

FIG. 1- DERATING CURVE OUTPUT RECTIFIED CURRENT

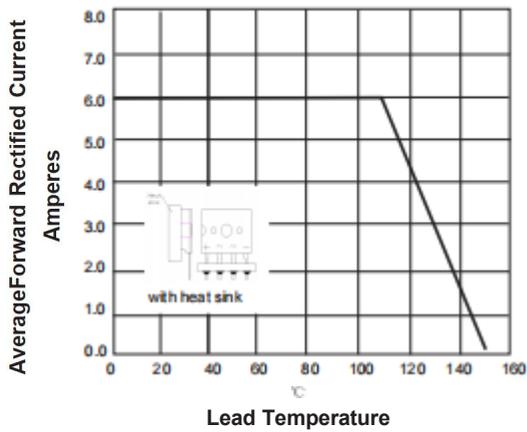


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

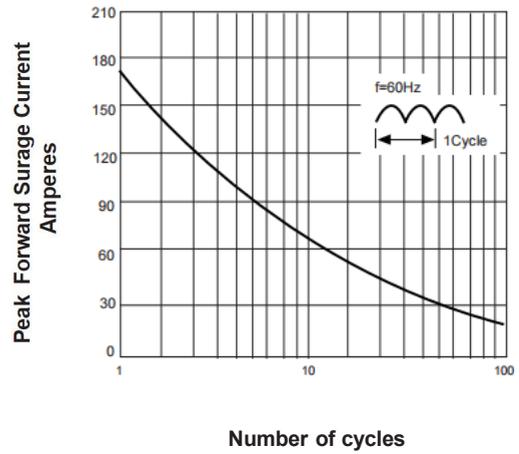


FIG. 3-TYPICAL FORWARD VOLTAGE CHARACTERISTICS

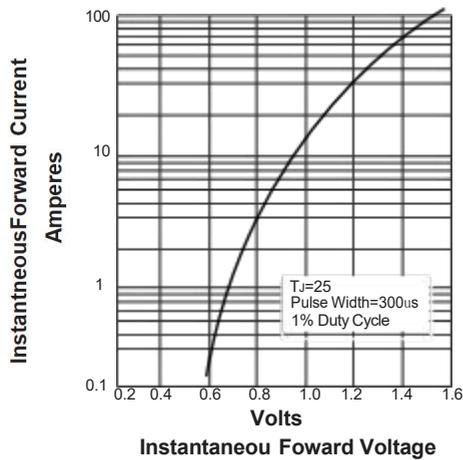


FIG. 4-TYPICAL REVERSE LEAKAGE CHARACTERISTICS

