

# Schottky Rectifier


## ■ Features

- $I_o$  2.0A
- $V_{RRM}$  20V-100V
- High surge current capability
- Cases: Molded plastic

## ■ Applications

- Rectifier

## ■ Outline Dimensions and Mark

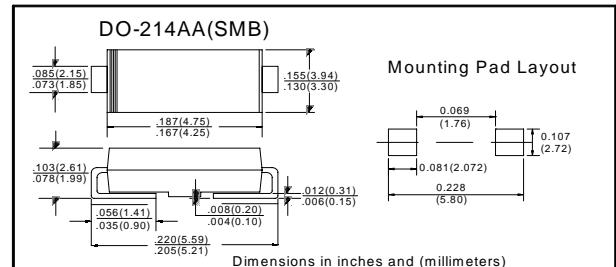

## ■ Limiting Values (Absolute Maximum Rating)

Item	Symbol	Unit	Test Conditions	SK 22	SK 23	SK 24	SK 25	SK 26	SK 29	SK 2B
Repetitive Peak Reverse Voltage	$V_{RRM}$	V		20	30	40	50	60	90	100
Average Forward Current	$I_{F(AV)}$	A	60HZ Half-sine wave, Resistance load, TL(Fig.1)						2.0	
Surge(Non-repetitive)Forward Current	$I_{FSM}$	A	60Hz Half-sine wave, 1 cycle , $T_a=25^\circ C$						50	
Junction Temperature	$T_J$	$^\circ C$			-55~+125				-55~+150	
Storage Temperature	$T_{STG}$	$^\circ C$							-55 ~ +150	

## ■ Electrical Characteristics ( $T_a=25^\circ C$ Unless otherwise specified)

Item	Symbol	Unit	Test Condition	SK 22	SK 23	SK 24	SK 25	SK 26	SK 29	SK 2B			
Peak Forward Voltage	$V_F$	V	$I_f=2.0A$	0.50			0.70			0.85			
Peak Reverse Current	$I_{RRM1}$	mA	$V_{RM}=V_{RRM}$	$T_a=25^\circ C$			0.5			0.1			
	$I_{RRM2}$			$T_a=100^\circ C$			10			5.0			
Thermal Resistance(Typical)	$R_{\theta J-A}$	$^\circ C/W$	Between junction and ambient			75 <sup>1)</sup>							
	$R_{\theta J-L}$		Between junction and terminal			17 <sup>1)</sup>							

## Notes:

- 1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.3" x 0.3" (8.0 mm x 8.0 mm) copper pad areas

## ■ Characteristics(Typical)

