

## ESD Protection Diodes


The FTV05CEUL2 is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium. Because of its small size, it is suited for use in cellular phones, MP3 players, digital cameras and many other portable applications where board space is at a premium.

### Applications

- Cellular phones
- Portable devices
- Digital cameras
- Power supplies

### Features

- Small Body Outline Dimensions
- Low Body Height
- Peak Power up to 180 Watts @ 8 x 20  $\mu$ s Pulse
- Low Leakage current
- Response Time is Typically < 1 ns

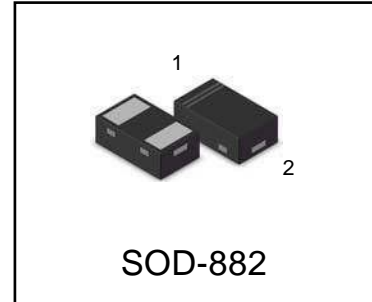

### Ordering information

Device	Marking	Shipping
FTV05CEUL2	T5	10000/Tape&Reel


### Absolute Ratings (T<sub>a</sub>=25°C )

Symbol	Parameter	Value	Units
P <sub>pp</sub>	Peak Pulse Power (t <sub>p</sub> = 8/20 $\mu$ s)	180	W
T <sub>L</sub>	Maximum lead temperature for soldering during 10s	260	°C
T <sub>stg</sub>	Storage Temperature Range	-65 to +150	°C
T <sub>op</sub>	Operating Temperature Range	-40 to +125	°C
T <sub>j</sub>	Maximum junction temperature	125	°C
	IEC61000-4-2 (ESD)	air discharge contact discharge	$\pm$ 30 $\pm$ 30 KV

## ELECTRICAL CHARACTERISTICS

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

Symbol	Parameter
$I_{PP}$	Maximum Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$
$V_{RWM}$	Working Peak Reverse Voltage
$I_R$	Maximum Reverse Leakage Current @ $V_{RWM}$
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$P_{pk}$	Peak Power Dissipation
C	Capacitance @ $V_R = 0$ and $f = 1.0$ MHz

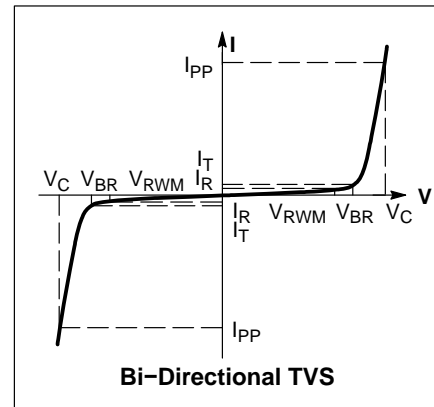


## ELECTRICAL CHARACTERISTICS


Device	$V_{RWM}$ (V)	$I_R$ (uA) @ $V_{RWM}$	$V_{BR}$ (V) @ $I_T$ (Note 1)		$I_T$	$V_C$ (V) @ $I_{PP} = 1$ A	$V_C$ (V) @ $I_{PP} = 12$ A	$I_{PK}$ (A)	$P_{PK}$ (W)	C (pF)
	Max	Max	Min	Max	mA	Max	Max	Max	Max	Max
FTV05CEUL2	5.0	0.1	5.5	7.5	1.0	8	11	16	180	45

\*Surge current waveform per Figure 1.

- $V_{BR}$  is measured with a pulse test current  $I_T$  at an ambient temperature of  $25^\circ\text{C}$

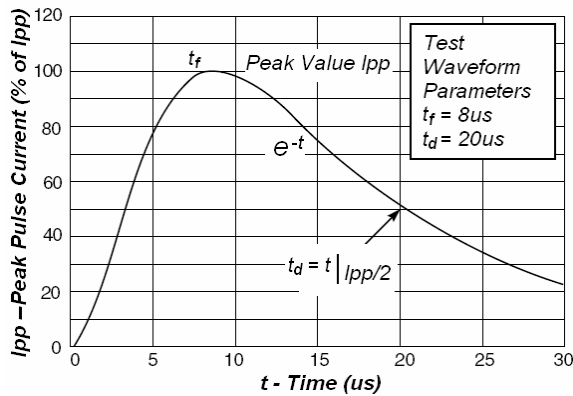


**Fig1. Pulse Waveform**

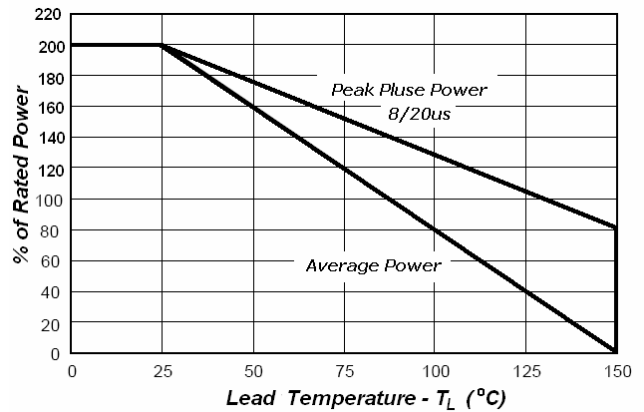

**Fig2. Power Derating Curve**

## OUTLINE AND DIMENSIONS


### SOD-882

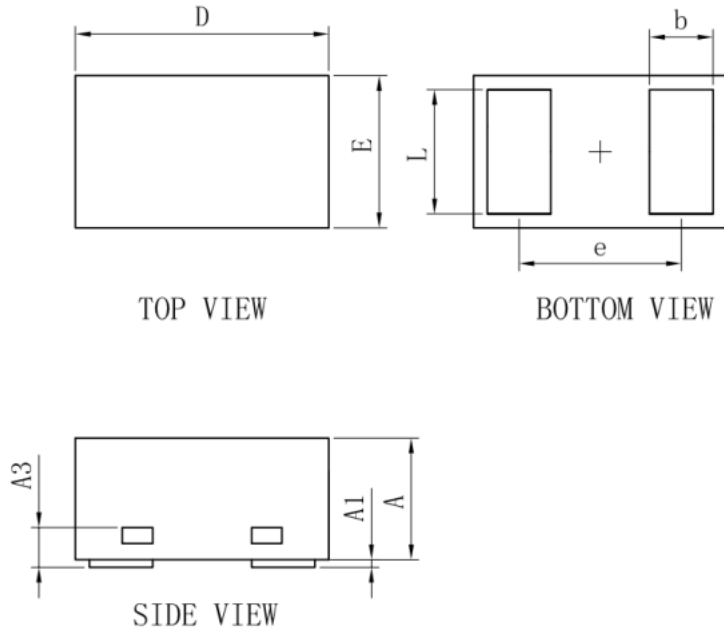

SOD-882			
Dim	Min	Typ	Max
D	0.95	1.00	1.05
E	0.55	0.60	0.65
e	-	0.64	-
L	0.44	0.49	0.54
b	0.20	0.25	0.30
A	0.43	0.48	0.53
A1	0	-	0.05
A3	0.127REF.		
All Dimensions in mm			

## SOLDERING FOOTPRINT

### SOD-882

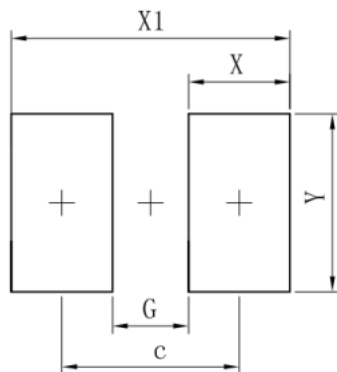

Dimensions	(mm)
c	0.70
G	0.30
X	0.40
X1	1.10
Y	0.70