


PNP Power Transistor with N-MOSFET

$V_{(BR)DSS}/V_R$	$R_{DS(on)}$ MAX	I_D/I_C
20V	600mΩ@4.5V	0.8A
	650mΩ@2.5V	
	700mΩ@1.8V	
- 32V	/	- 1.5A

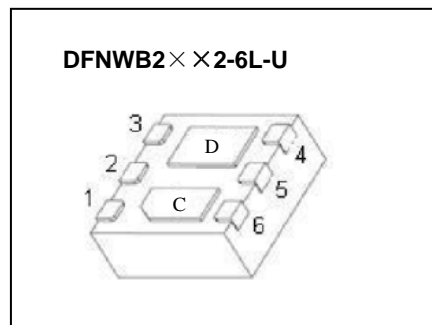



FEATUERE

- Ultra low collector-to-emitter saturation voltage
- High DC current gain
- Small package DFNWB2×2-6L-U

APPLICATION


- Charging circuit
- Other power management in portable equipment

MARKING



32 = Device code
YY=Code

Equivalent circuit



ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Unit
PNP Transistor			
V_{CBO}	Collector-Base Voltage	-32	V
V_{CEO}	Collector-Emitter Voltage	-32	V
V_{EBO}	Emitter-Base Voltage	-6	V
I_C	Collector Current-Continuous (Note1)	-1.5	A
	Collector Current-Continuous(Note2)	-0.6	A
I_{CM}	Collector Current-Pulse(Note3)	-4	A
N-MOSFET			
V_{DS}	Drain-Source Voltage	20	V
V_{GS}	Gate-Source Voltage	±5	V
I_D	Continuous Drain Current (note 1)	0.8	A
	Collector Current-Continuous (Note2)	0.69	A
I_{DM}	Collector Current-Pulse (Note3)	1.4	A
Power Dissipation, Temperature and Thermal Resistance			
P_D	PowerDissipation	0.7	W
P_C	Power Dissipation ($T_c=25^\circ\text{C}$, Note1)	2.5	W
$R_{\theta JA}$	Thermal Resistance from Junction to Ambient	178.6	$^\circ\text{C}/\text{W}$
T_J, T_{stg}	Operation Junction and Storage Temperature Range	- 55~ +150	$^\circ\text{C}$
T_L	Lead Temperature	260	$^\circ\text{C}$



ELECTRICAL CHARACTERISTICS

Ta =25 °C unless otherwise specified








Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
PNP Transistor						
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=-1mA, I_E=0$	-32			V
Collector-emitter breakdown	$V_{(BR)CEO}$	$I_C=-10mA, I_B=0$	-32			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=-100uA, I_C=0$	-6			V
Collector cut-off current	I_{CBO}	$V_{CB}=-30V, I_E=0$			-0.1	uA
Emitter cut-off current	I_{EBO}	$V_{EB}=-5V, I_C=0$			-0.1	uA
DC current gain	h_{FE}	$V_{CE}=-2V, I_C=-0.5A$	100		300	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=-0.5A, I_B=-50mA$			-0.35	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=-0.5A, I_B=-50mA$			-1.5	V
Base-emitter voltage	$V_{BE(on)}$	$V_{CE}=-2V, I_C=-500mA$			-1.1	V
N-MOSFET						
STATIC PARAMETERS						
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	20			V
Zero gate voltage drain current	I_{DSS}	$V_{DS} = 16V, V_{GS} = 0V$			100	nA
Gate-body leakage current	I_{GSS}	$V_{GS} = \pm 5V, V_{DS} = 0V$			± 1	uA
Gate threshold voltage (note 3)	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	0.44		1.1	V
Drain-source on-resistance(note 3)	$R_{DS(on)}$	$V_{GS} = 4.5V, I_D = 0.55A$		250	600	m Ω
		$V_{GS} = 2.5V, I_D = 0.5A$		330	650	m Ω
		$V_{GS} = 1.8V, I_D = 0.35A$		550	700	m Ω
Diode forward voltage (note 3)	V_{SD}	$I_S = 0.35A, V_{GS} = 0V$	0.5		1.1	V
DYNAMIC PARAMETERS (note 4)						
Input Capacitance	C_{iss}	$V_{DS} = 10V, V_{GS} = 0V, f = 100KHz$		61		pF
Output Capacitance	C_{oss}			17		pF
Reverse Transfer Capacitance	C_{rss}			10		pF
SWITCHING PARAMETERS (note 4)						
Turn-on delay time	$t_{d(on)}$	$V_{GEN} = 4.5V, V_{DD} = 10V, I_D = 500mA, R_{GEN} = 6\Omega, R_L = 10\Omega$		33		ns
Turn-on rise time	t_r			102		ns
Turn-off delay time	$t_{d(off)}$			790		ns
Turn-off fall time	t_f			439		ns
Total Gate Charge	Q_g	$V_{DS} = 10V, V_{GS} = 4.5V, I_D = 0.6A$		1.15		nC
Gate-Source Charge	Q_{gs}			0.15		nC
Gate-Drain Charge	Q_{gd}			0.23		nC

Notes :

- 1.Surface mounted on FR4 board using 1 square inch pad size,1oz copper.
- 2.Surface mounted on FR4 board using the minimum pad size,1oz copper.
3. Pulse test : Pulse width=300 μ s, duty cycle \leq 2%.
4. These parameters have no way to verify.

Typical Characteristics







PNP Transistor

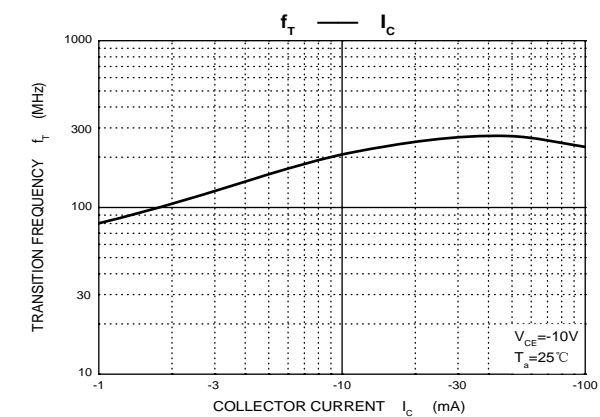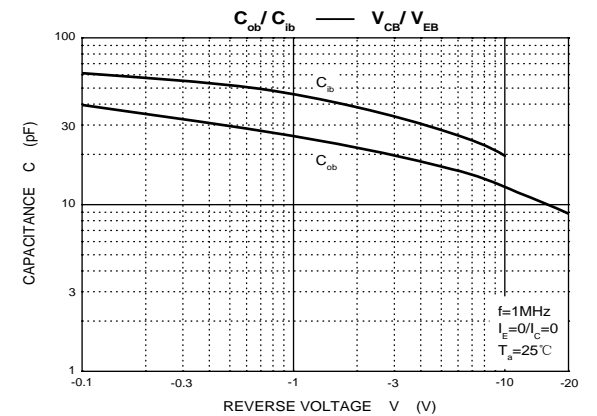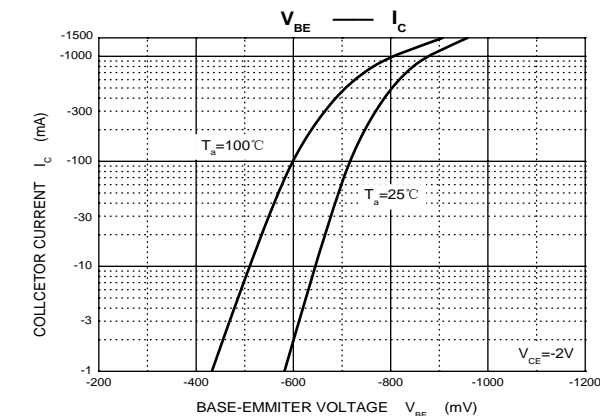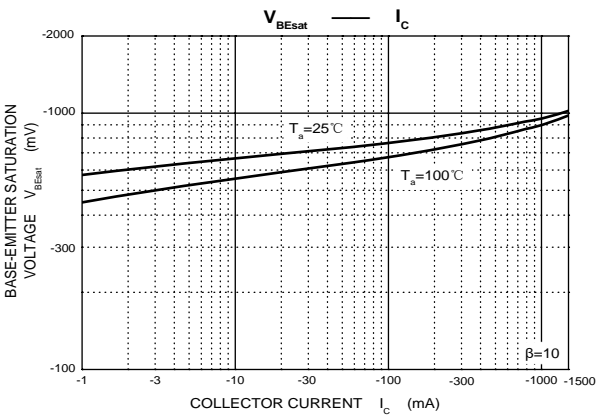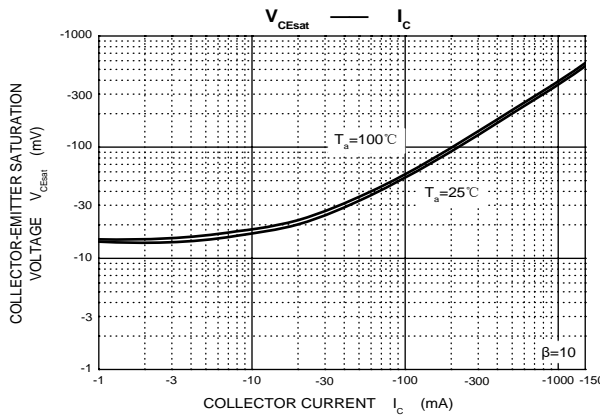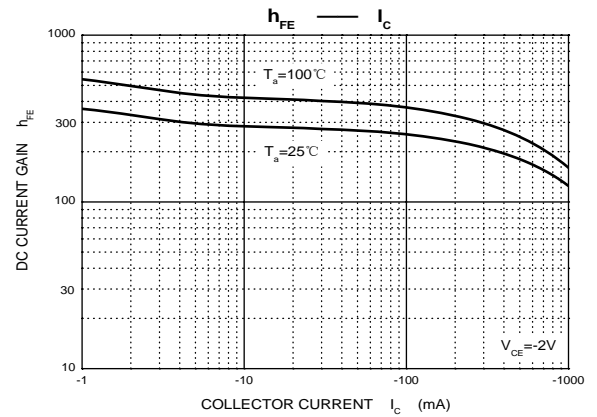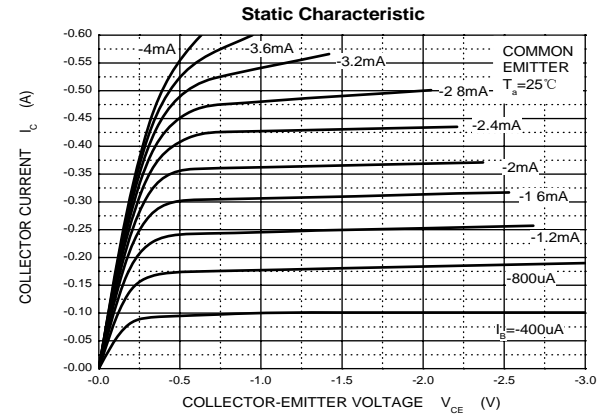






FTKMNT32

N-channel Characteristics

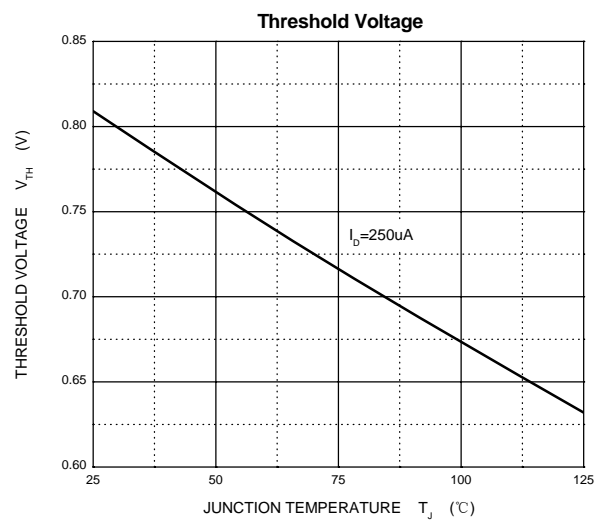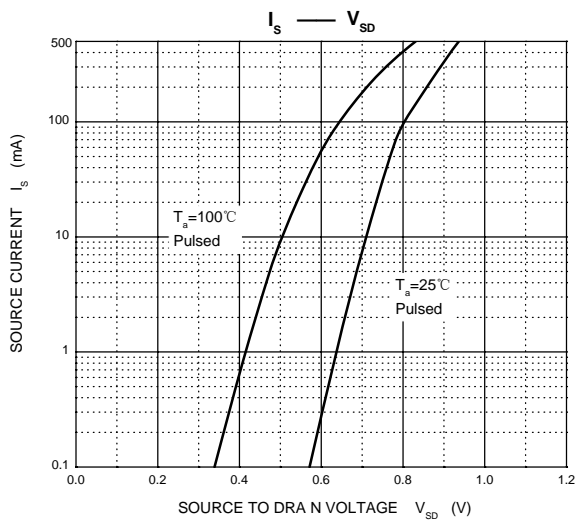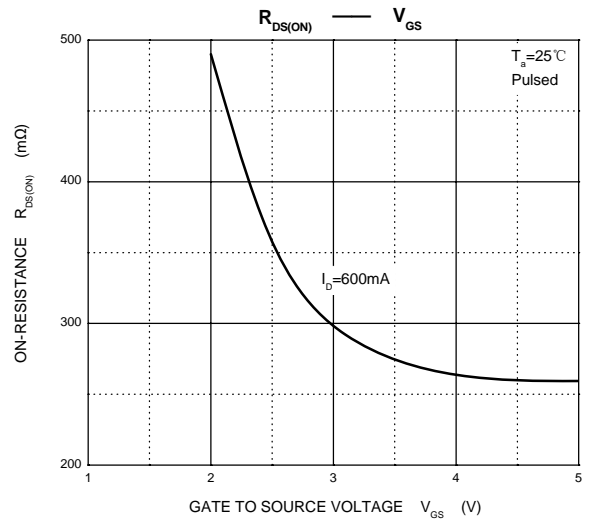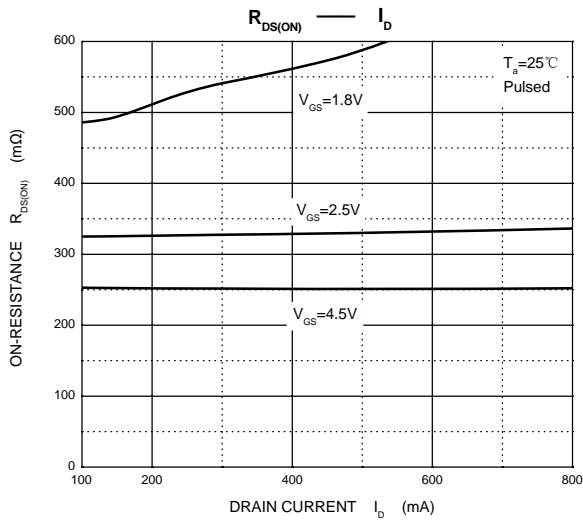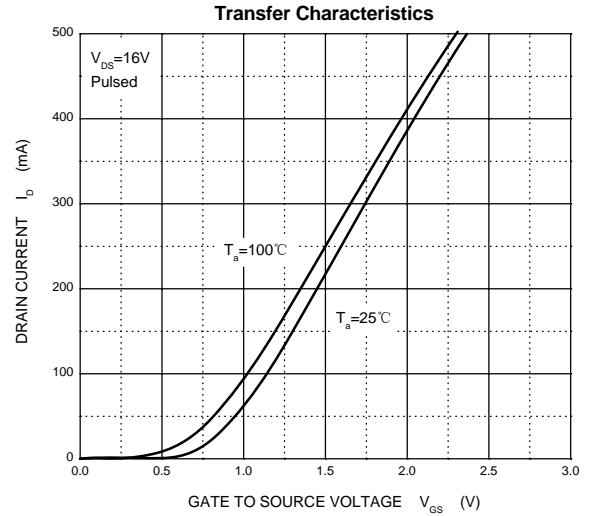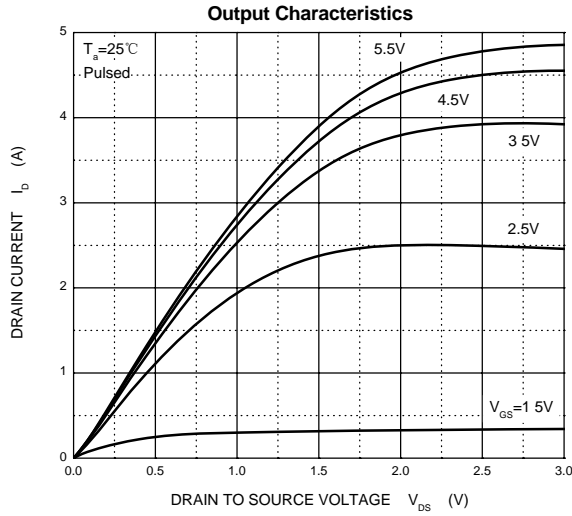


DFNWB2x2-6L-U Package Outline Dimensions

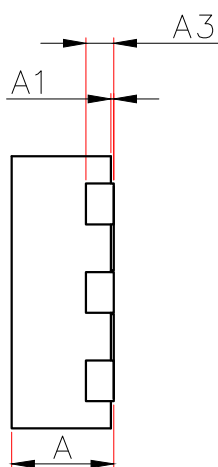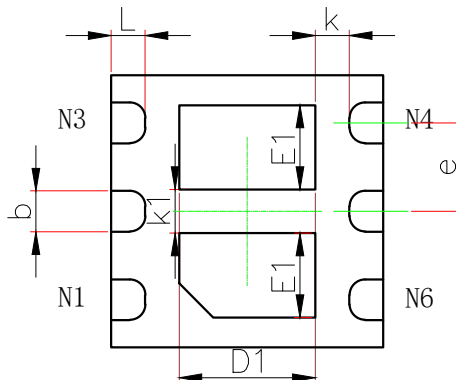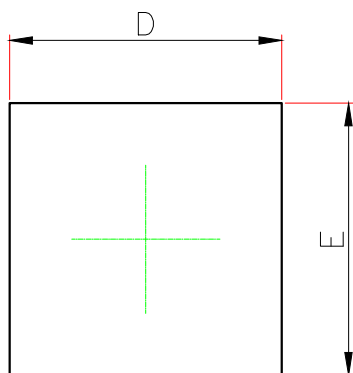

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN.	MAX.	MIN.	MAX.
A	0.700	0.800	0.028	0.031
A1	0.000	0.050	0.000	0.002
A3	0.203REF.		0.008REF.	
D	1.900	2.100	0.075	0.083
E	1.900	2.100	0.075	0.083
D1	0.900	1.100	0.035	0.043
E1	0.520	0.720	0.020	0.028
b	0.250	0.350	0.010	0.014
e	0.650TYP.		0.026TYP.	
k	0.200MIN.		0.008MIN.	
k1	0.320REF.		0.013REF.	
L	0.200	0.300	0.008	0.012

DFNWB2x2-6L-U Suggested Pad Layout

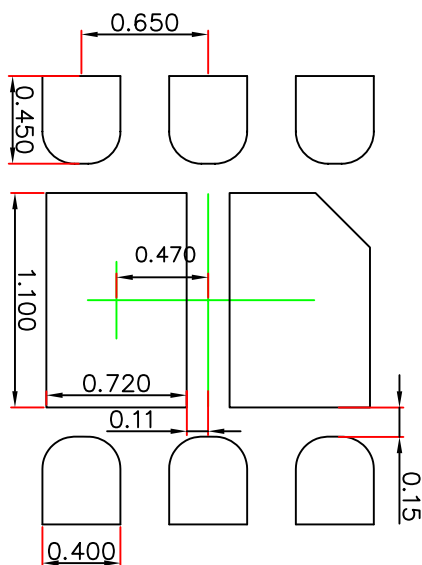


Note:

1. Controlling dimension: in millimeters.
2. General tolerance: ± 0.050 mm.
3. The pad layout is for reference purposes only.

DFNWB 2X2-6L Tape and Reel

DFNWB2×2-6L Embossed Carrier Tape

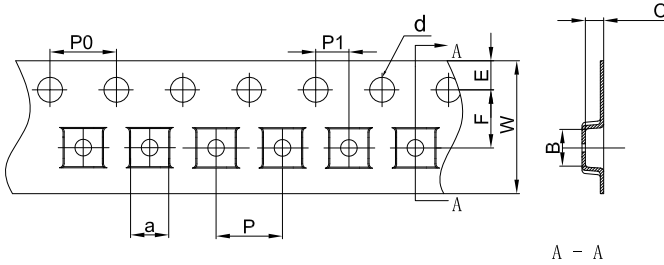


Packaging Description:

DFNWB2×2-6L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 18.0cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).


Dimensions are in millimeter

Pkg type	a	B	C	d	E	F	P0	P	P1	W
DFNWB2×2-6L	2.30	2.30	1.10	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

DFNWB2×2-6L Tape Leader and Trailer

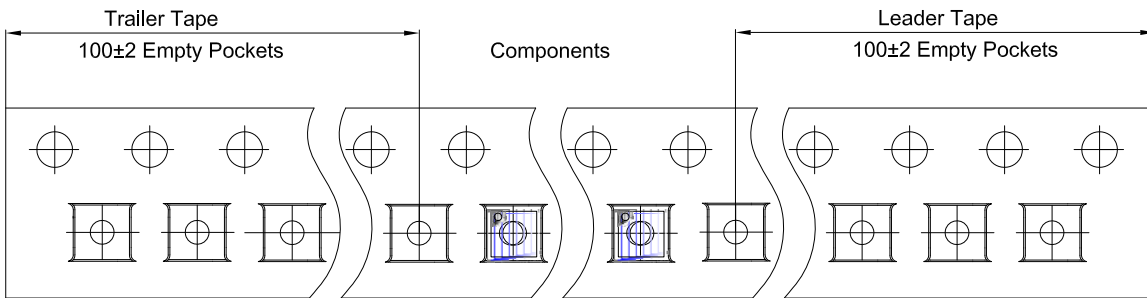

DFNWB2×2-6L Reel

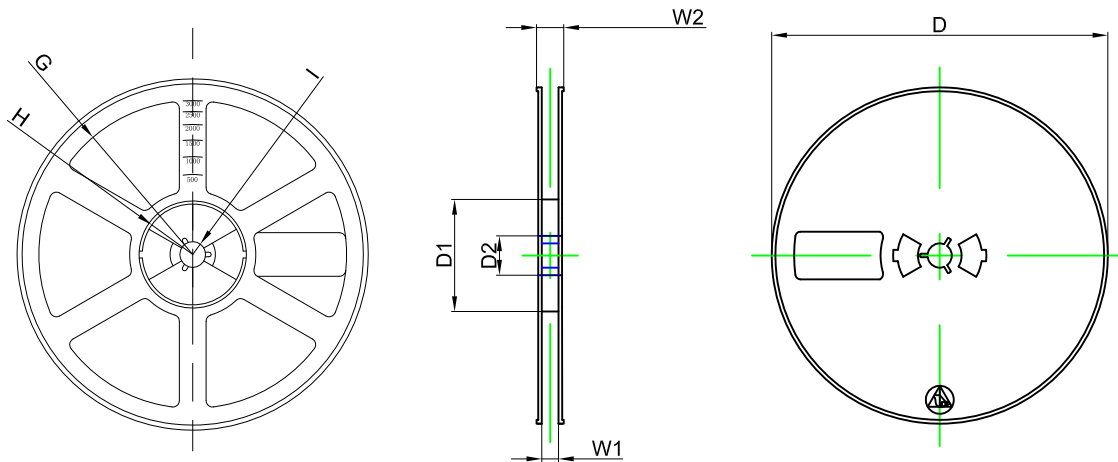

Dimensions are in millimeter

Reel Option	D	D1	D2	G	H	I	W1	W2
7" Dia	Ø180.00	60.00	13.00	R78.00	R25.60	R6.50	9.50	13.10

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	30,000 pcs	203×203×195	120,000 pcs	438×438×220	