


N- Channel MOSFET

$V_{(BR)DSS}$	$R_{DS(on)MAX}$	I_D
20V	11mΩ @ 4.5V	12A
	13mΩ @ 2.5V	
	16mΩ @ 1.8V	
	22mΩ @ 1.5V	
	41mΩ @ 1.2V	

DFNWB2 × 2- 6L- J

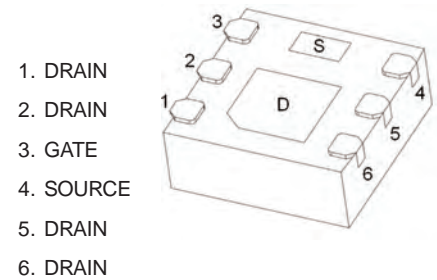


FEATURES

- TrenchFET Power MOSFET
- Small package DFNWB2 × 2-6L-J


APPLICATION

- Load Switch for Portable Applications

MARKING:



Equivalent Circuit



ABSOLUTE MAXIMUM RATINGS ($T_a=25^{\circ}C$ unless otherwise noted)

Symbol Para	meter	Value	Unit
V_{DS}	Drain-Source Voltage	20	V
V_{GS}	Gate-Source Voltage	±10	V
I_D	Continuous Drain Current (note 1)	12	A
I_{DM}	Collector Current-Pulse(Note3)	40	A
$R_{\theta JA}$	Thermal Resistance from Junction to Ambient (note 2)	167	$^{\circ}C/W$
T_j	Junction Temperature	150	$^{\circ}C$
T_{stg}	Storage Temperature	-55~+150	$^{\circ}C$
T_L	Lead Temperature for Soldering Purposes(1/8" from case for 10 s)	260	$^{\circ}C$


Electrical characteristics (T_a=25°C unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
STATIC PARAMETERS						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D =250μA	20			V
Zero gate voltage drain current	I _{DSS}	V _{DS} =20V, V _{GS} = 0V			1	uA
Gate-body leakage current	I _{GSS}	V _{GS} =±10V, V _{DS} = 0V			±100	nA
Gate threshold voltage (note 3)	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	0.35		1	V
Drain-source on-resistance(note 3)	R _{DS(on)}	V _{GS} =4.5V, I _D =9.7A			11	mΩ
		V _{GS} =2.5V, I _D =9A			13	mΩ
		V _{GS} =1.8V, I _D =8.1A			16	mΩ
		V _{GS} =1.5V, I _D =4.5A			22	mΩ
		V _{GS} =1.2V, I _D =2.4A			41	mΩ
Forward tranconductance(note 3)	g _{FS}	V _{DS} =4V, I _D =9.7A	20			S
Diode forward voltage (note 3)	V _{SD}	I _S =10A, V _{GS} = 0V			1.2	V
DYNAMIC PARAMETERS (note 4)						
Input Capacitance	C _{iSS}	V _{DS} =4V, V _{GS} =0V, f =1MHz		1800		pF
Output Capacitance	C _{oSS}			650		pF
Reverse Transfer Capacitance	C _{rSS}			450		pF
Gate Resistance	R _g	f=1MHz		2.5		Ω
SWITCHING PARAMETERS (note 4)						
Turn-on delay time	t _{d(on)}	V _{GEN} =4.5V, V _{DD} =4V, I _D =10A, R _g =1Ω R _L =0.4 Ω		12	20	ns
Turn-on rise time	t _r			10	15	ns
Turn-off delay time	t _{d(off)}			65	100	ns
Turn-off fall time	t _f			20	30	ns
Total Gate Charge	Q _g	V _{DS} =4V, V _{GS} =5V I _D =10A			32	nC
Gate-Source Chage	Q _{gs}			2.5		nC
Gage-Drain Charge	Q _{gd}			6.5		nC


Notes :

- 1.Surface mounted on FR4 board using 1 square inch pad size,1oz copper.
- 2.Surface mounted on FR4 board using the minimum pad size,1oz copper.
3. Pulse test : Pulse width=300μs, duty cycle≤2%.
4. These parameters have no way to verify.


DFNWB2 × 2-6L-J Package Outline Dimensions (Unit:mm)

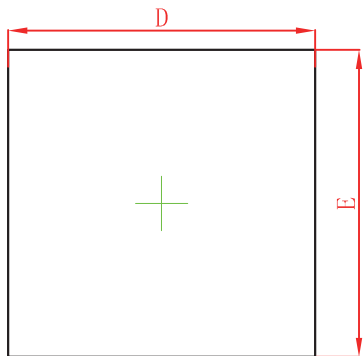

TOP VIEW

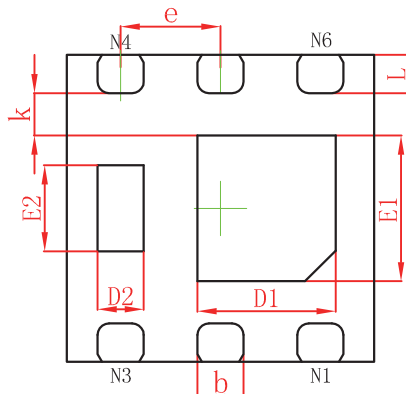


BOTTOM VIEW

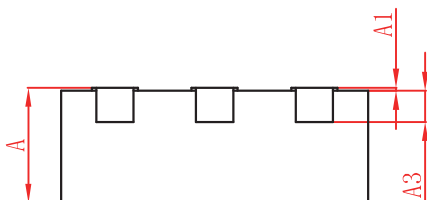

SIDE VIEW

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700/0.800	0.800/0.900	0.028/0.03	0.031/0.035
A1	0.000	0.050	0.000	0.002
A3	0.203REF.		0.008REF.	
D	1.924	2.076	0.076	0.082
E	1.924	2.076	0.076	0.082
D1	0.800	1.000	0.031	0.039
E1	0.850	1.050	0.033	0.041
D2	0.200	0.400	0.008	0.016
E2	0.460	0.660	0.018	0.026
k	0.200MIN.		0.008MIN.	
b	0.250	0.350	0.010	0.014
e	0.650TYP.		0.026TYP.	
L	0.174	0.326	0.007	0.013


DFNWB2 × 2-6L-J Suggested Pad Layout

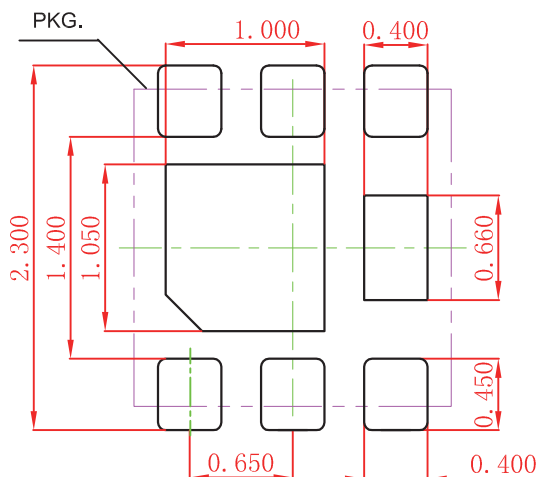

Note:
 1. Controlling dimension: in millimeters.
 2. General tolerance: ± 0.050mm.
 3. The pad layout is for reference purposes only.

DFNWB2X2-6L J Tape and Reel

DFNWB2×2-6L Embossed Carrier Tape

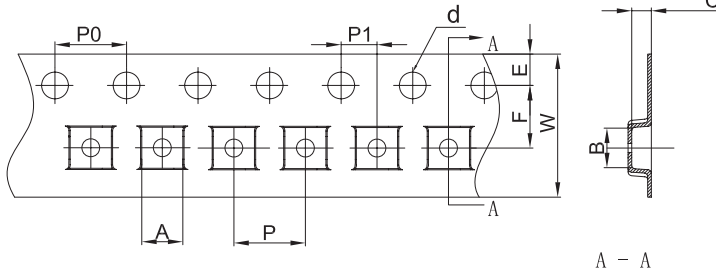


Packaging Description:


DFNWB2×2-6L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
DFNWB2×2-6L	2.30	2.30	1.10	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00
(Tolerance)	+/-0.05	+/-0.05	+/-0.05	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+0.3/-0.1

DFNWB2×2-6L Tape Leader and Trailer

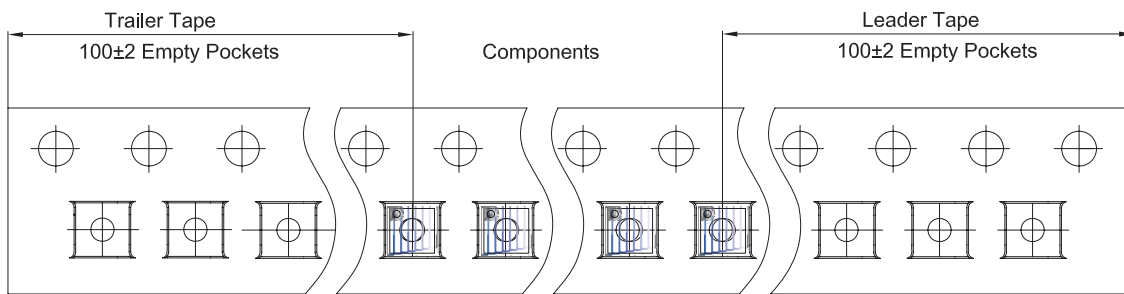

DFNWB2×2-6L Reel

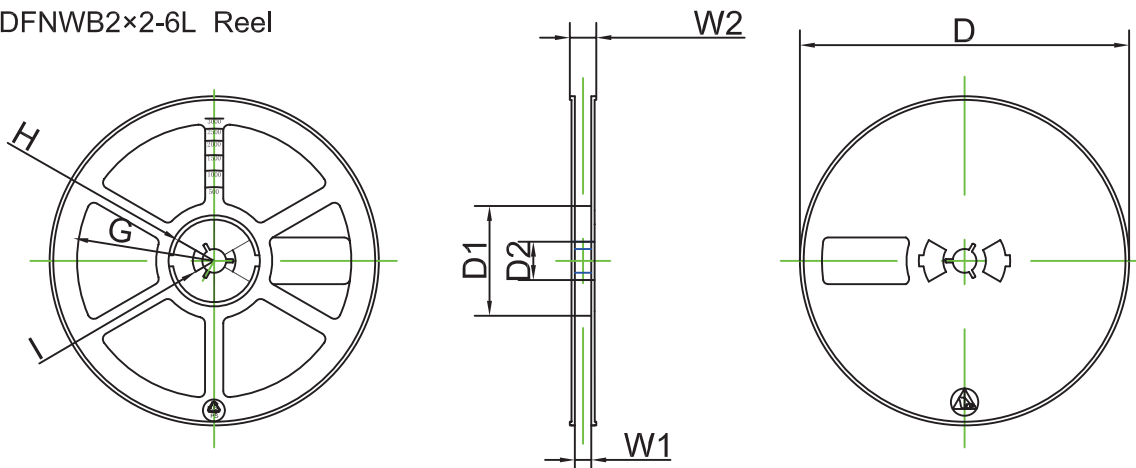

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7" Dia	Ø180.00	60.00	13.00	R78.00	R25.60	R11.50	9.50	13.10
Tolerance	+0/-3	+/-0.5	+/-0.2	+/-1	+/-1	+/-1	+/-1	+/-1.3

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	30,000 pcs	203×203×195	120,000 pcs	438×438×220	