




Bridge Rectifier

■ **Features**

- I_o 6A
- V_{RRM} 50V~1000V
- Glass passivated chip
- High surge forward current capability

■ **Outline Dimensions and Mark**

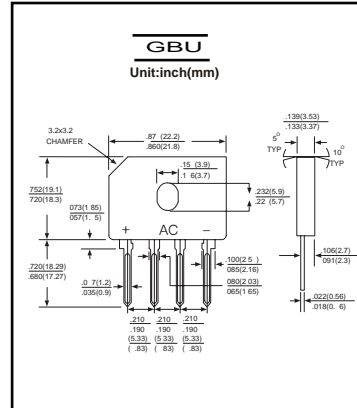

■ **Applications**

- General purpose 1 phase Bridge rectifier applications

■ **Limiting Values (Absolute Maximum Rating)**

Item	Symbol	Unit	Conditions	GBU6						
				05	01	02	04	06	08	10
Repetitive Peak Reverse Voltage	V_{RRM}	V		50	100	200	400	600	800	1000
Average Rectified Output Current	I_o	A	60Hz sine wave, R-load	With heatsink $T_c = 80^\circ C$	6					
				Without heatsink $T_a = 25^\circ C$	2.8					
Surge(Non-repetitive)Forward Current	I_{FSM}	A	60Hz sine wave, 1 cycle, $T_j = 25^\circ C$	175						
Current Squared Time	I^2t	A ² S	$1ms \leq t < 8.3ms$ $T_j = 25^\circ C$. Rating of per diode	127						
Storage Temperature	T_{stg}	$^\circ C$		-55 ~ +150						
Junction Temperature	T_j	$^\circ C$		-55 ~ +150						
Dielectric Strength	V_{dis}	KV	Terminals to case, AC 1 minute	2						
Mounting Torque	T_{or}	kg · cm	Recommend torque: 5kg · cm	8						

■ **Electrical Characteristics ($T_a = 25^\circ C$ Unless otherwise specified)**

Item	Symbol	Unit	Test Condition	Max
Peak Forward Voltage	V_{FM}	V	$I_{FM} = 3A$, Pulse measurement, Rating of per diode	1.05
Peak Reverse Current	I_{RRM}	μA	$V_{RM} = V_{RRM}$, Pulse measurement, Rating of per diode	10
Thermal Resistance	$R_{\theta J-A}$	$^\circ C/W$	Between junction and ambient, Without heatsink	26
	$R_{\theta J-C}$		Between junction and case, With heatsink	3.4

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

