


Glass Passivated Single-Phase 8.0Amp Surface Mount Bridge Rectifier

Features

- Surface mount bridge, small package;
- Ideal for printed circuit boards;
- Glass passivated chip junction;
- High forward current capability up to 8.0A;
- High surge current capability;
- High heat dissipation capability;
- Low profile package;
- Low forward voltage drop;
- Plastic package has Underwrites Laboratory Flammability Classification 94V-0;

Mechanical Data

- Case: HBS;
- Epoxy meets UL-94V-0 Flammability rating;
- Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD22-B102;
- High temperature soldering guaranteed:
Solder Reflow 260°C, 10seconds;
- Polarity: As marked on body;
- Marking: Type number;

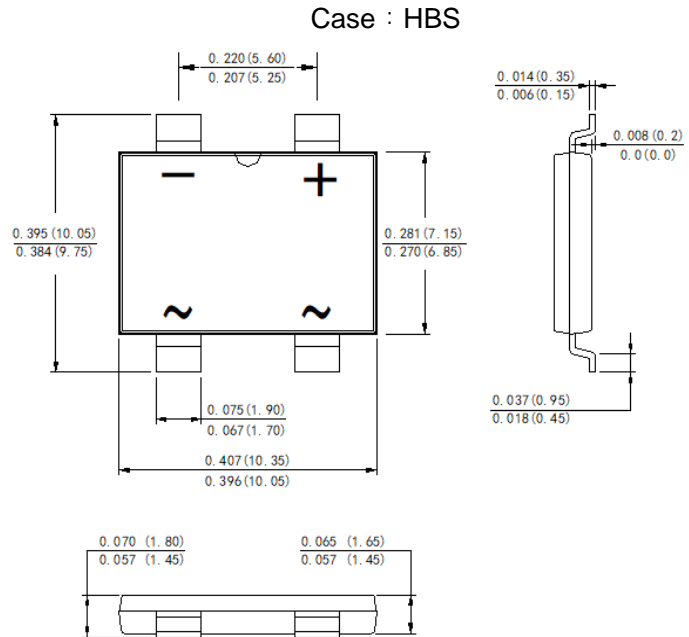

Typical Applications

General purpose use in AC-to-DC bridge full wave rectification for Fast Charging, Switching Power Supply, USB PD, Adapter and 3-in-1 Power Board, etc.

Dimensions in inches and millimeters

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single Phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.






Parameter	Symbol	RHBS802	RHBS804	RHBS806	RHBS808	RHBS810	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	200	400	600	800	1000	V
Maximum average forward rectified output current at $T_A=25^\circ\text{C}$	$I_{F(AV)}$	8.0					Amps
Non-Repetitive Peak forward surge current 8.3 ms single sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	200					Amps
Rating for fusing ($t<8.3\text{ms}$)	I^2t	166					A ² sec
Instantaneous forward voltage drop per diode	V_F	@ $I_F=1.0\text{A}$	0.95 max.				Volt
		@ $I_F=4.0\text{A}$	1.1 max.				
		@ $I_F=8.0\text{A}$	1.3max.				
Reverse Current at Rated DC Blocking Voltage	I_R	$T_A=25^\circ\text{C}$	0.20 Typ.		5.0 max		μA
		$T_A=125^\circ\text{C}$	50 Typ.		100 max.		
Maximum reverse recovery time ($I_F=0.5\text{A}, I_R=1.0\text{A}, I_{rr}=0.25\text{A}$)	T_{rr}	150	250	500			nS
Typical thermal resistance	$R_{\theta J-A}$	70.0					$^\circ\text{C}/\text{W}$
	$R_{\theta J-C}$	15.0					
	$R_{\theta J-L}$	22.0					
Operating junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150					$^\circ\text{C}$

Note1: Measured at 1.0MHz and applied reverse voltage of 5.0V DC;

Glass Passivated Single-Phase 8.0Amp Surface Mount Bridge Rectifier

Ratings and Characteristics Curves

($T_A = 25^\circ\text{C}$ unless otherwise noted)

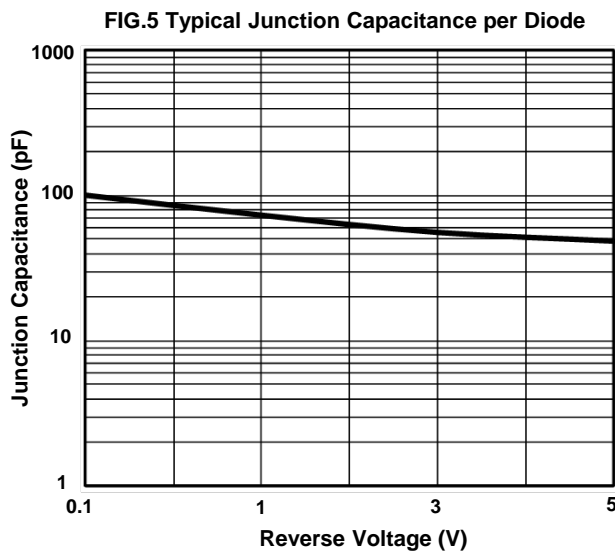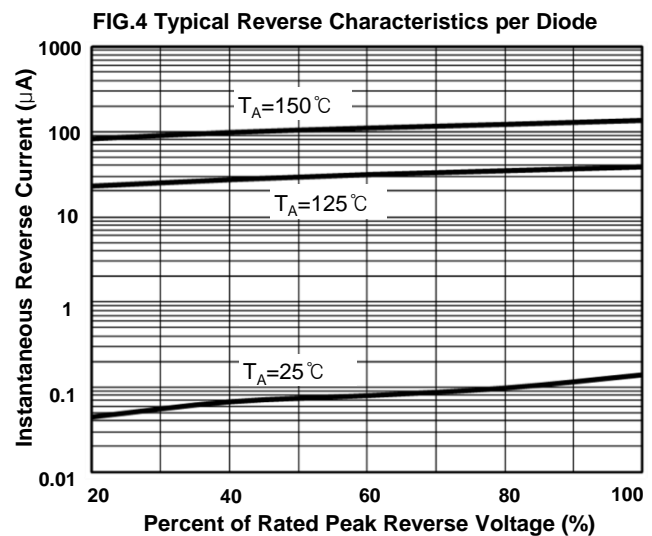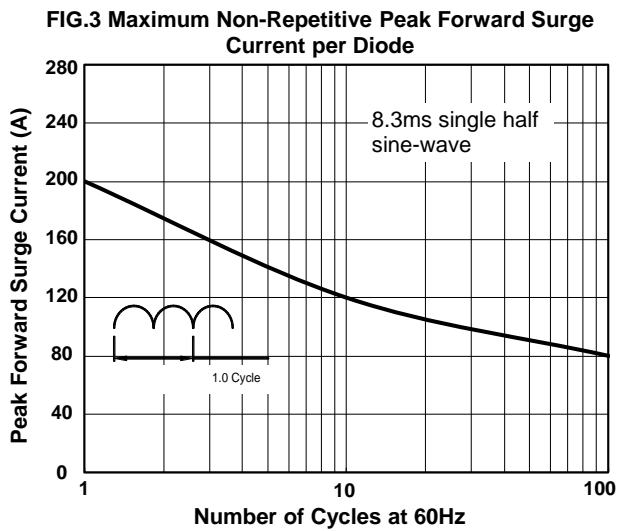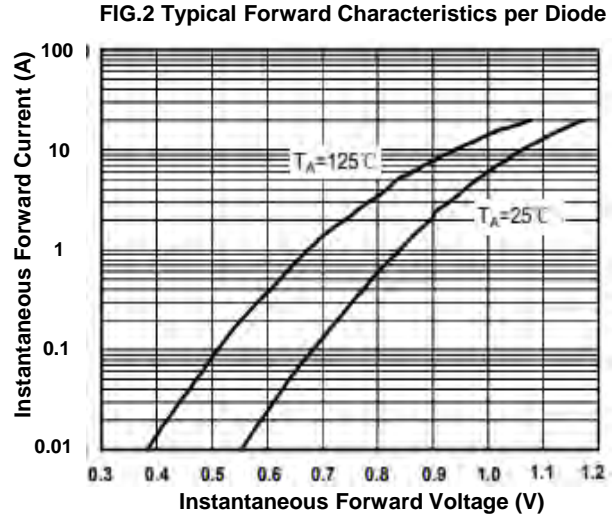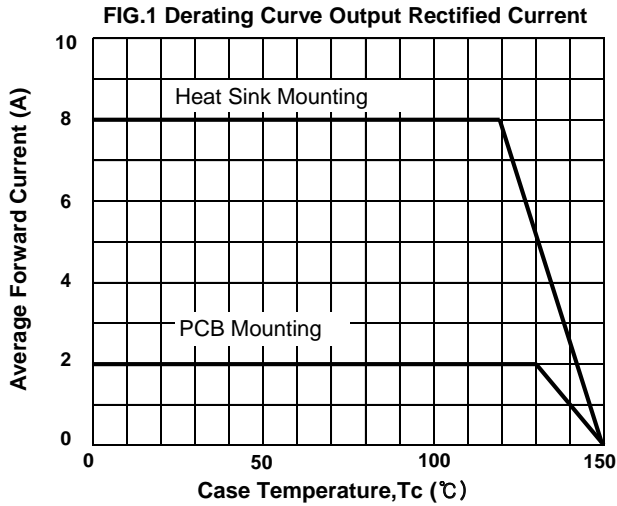

Suggested PCB printfoot layout

