

SINGLE PHASE 15.0AMP GLASS PASSIVATED BRIDGE RECTIFIER



Features

- Glass passivated die construction
- Low forward voltage drop
- High current capability
- High surge current capability
- Plastic material-UL flammability 94V-0

Mechanical Data

- Case: Molded plastic, GBJ
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: As Marked on Case
- Mounting Position: Any
- Marking: Type Number
- Lead Free: For RoHS / Lead Free Version

GBJ

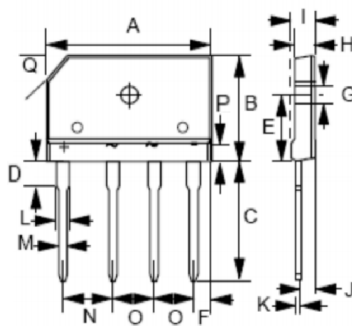

GBJ		
DIM	MIN	MAX
A	29.70	30.30
B	19.70	20.30
C	17.0	18.0
D	4.40	4.80
E	10.80	11.20
F	2.30	2.70
G	3.10 ∅	3.40 ∅
H	3.40	3.80
I	4.40	4.80
J	2.50	2.90
K	0.60	0.80
L	2.00	2.40
M	0.90	1.10
N	9.80	10.20
O	7.30	7.70
P	4.40	4.80
Q	(3.0) x 45°	
All Dimensions in millimeter		

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.
Single Phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

NUMBER	SYMBOL	EGBJ 1506	UNITS
Peak Repetitive Reverse Voltage	V_{RRM}	600	V
Working Peak Reverse Voltage	V_{RWM}		
DC Blocking Voltage	V_{DC}		
RMS Reverse Voltage	V_{RMS}	420	V
Average Rectified Output Current (Note 2)@T _C =90 °C	IF(AV)	15.0	A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	220	A
I ² t Rating for Fusing (t < 8.3ms)	I ² t	200.86	A ² s
Forward Voltage per element @IF=7.5A	V _{FM}	1.7	V
Peak Reverse Current @T _A =25 °C At Rated DC Blocking Voltage @T _A =125 °C	I _R	5.0 500	uA
Maximum reverse recovery time	T _{rr}	35	ns
Between junction and ambient, Without heatsink	R _{θJA}	12	°C/W
Between junction and case, With heatsink	R _{θJC}	1.2	
Operating and Storage Temperature Range	T _J ,T _{STG}	-55to+150	°C

Note:

1. Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.

2. Thermal resistance from junction to case per element. Unit mounted on 75 x 75 x 1.6mm aluminum plate heat sink.

Fig. 1 Output Current Derating Curve

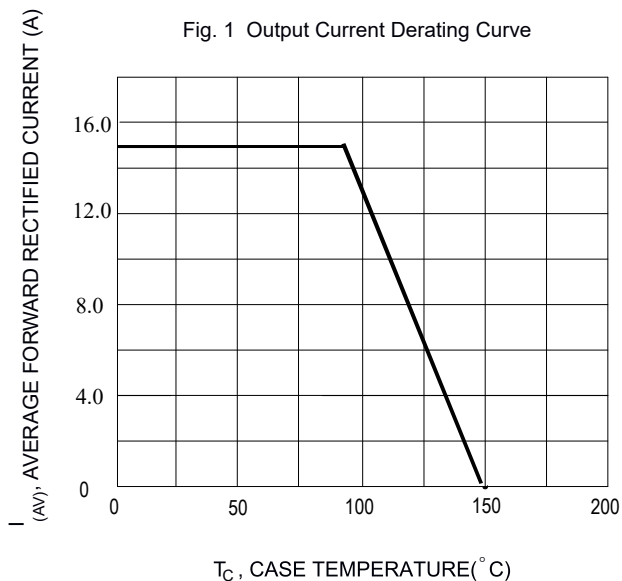


Fig. 2 Typical Forward Characteristics (per leg)

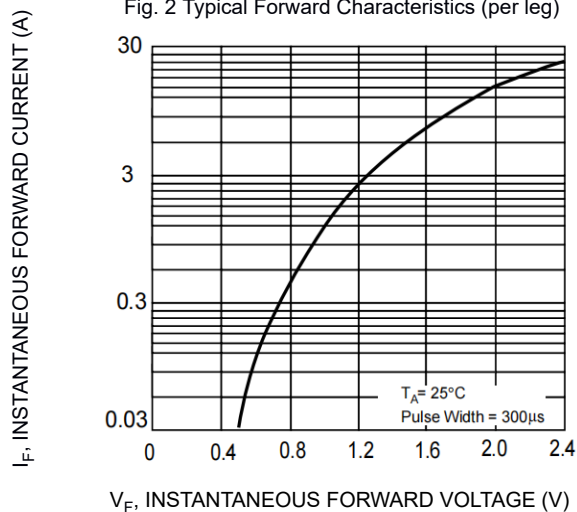


Fig. 3 Maximum Peak Forward Surge Current (per leg)

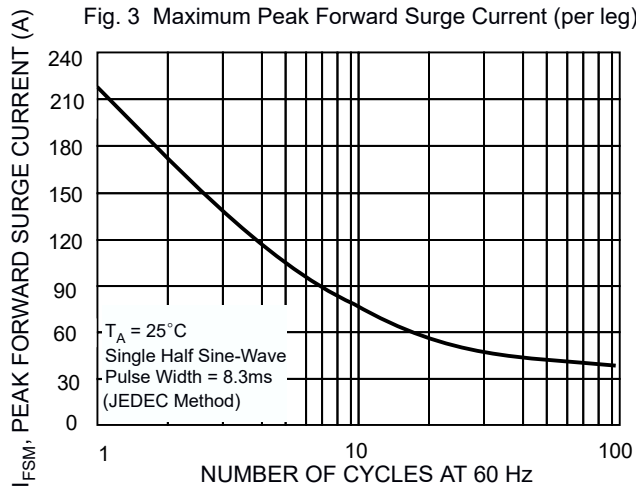


Fig. 4 Typical Junction Capacitance

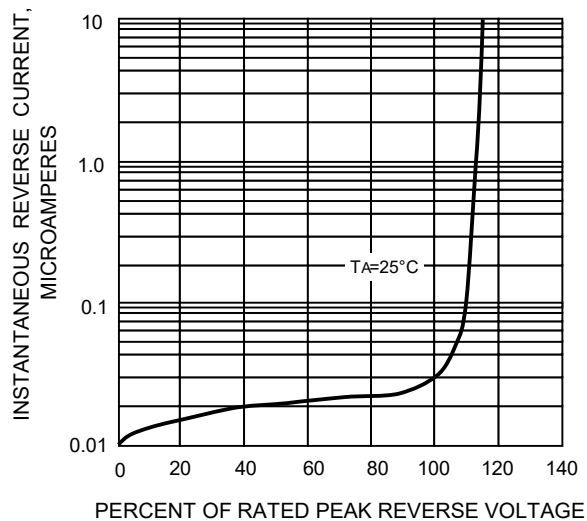


FIG.5 TYPICAL REVERSE CHARACTERISTICS

