

## Schottky Rectifier


### ■ Features

- $I_o$  3.0A
- $V_{RRM}$  20V-100V
- High surge current capability
- Cases: Molded plastic

### ■ Applications

- Rectifier

### ■ Outline Dimensions and Mark

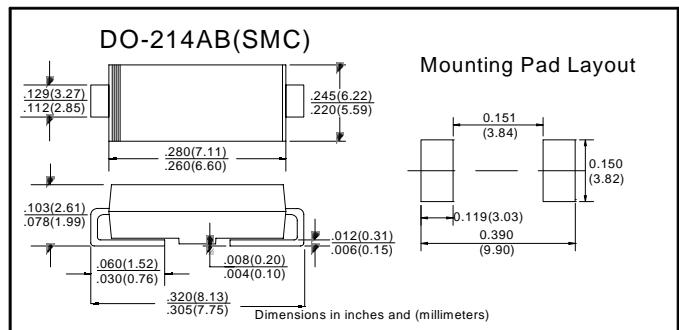

### ■ Limiting Values (Absolute Maximum Rating)

Item	Symbol	Unit	Test Conditions	SS 32	SS 33	SS 34	SS 35	SS 36	SS 39	SS 310
Repetitive Peak Reverse Voltage	$V_{RRM}$	V		20	30	40	50	60	90	100
Average Forward Current	$I_{F(AV)}$	A	60HZ Half-sine wave, Resistance load, TL(Fig.1)						3.0	
Surge(Non-repetitive)Forward Current	$I_{FSM}$	A	60Hz Half-sine wave ,1 cycle , $T_a = 25^\circ C$						100	
Junction Temperature	$T_J$	$^\circ C$				-55~+125				-55~+150
Storage Temperature	$T_{STG}$	$^\circ C$								-55 ~ +150

### ■ Electrical Characteristics ( $T_a=25^\circ C$ Unless otherwise specified)

Item	Symbol	Unit	Test Condition	SS 32	SS 33	SS 34	SS 35	SS 36	SS 39	SS 310	
Peak Forward Voltage	$V_F$	V	$I_F=3.0A$		0.50		0.70		0.85		
Peak Reverse Current	$I_{RRM1}$	mA	$V_{RM}=V_{RRM}$	$T_a=25^\circ C$		0.5				0.1	
	$I_{RRM2}$				10		5.0				
Thermal Resistance(Typical)	$R_{\theta J-A}$	$^\circ C/W$	Between junction and ambient				55 <sup>1)</sup>				
	$R_{\theta J-L}$		Between junction and terminal				17 <sup>1)</sup>				

### Notes:

- <sup>1)</sup> Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.6" x 0.6" (16 mm x 16 mm) copper pad areas

## ■ Characteristics(Typical)

