


**Schottky Barrier Rectifier
Reverse Voltage 60 Volts Forward Current 20 Amperes**

Features


- Plastic package has underwriters Laboratory Flammability Classification 94V-0
- Dual rectifier construction, positive center tap
- Metal of silicon rectifier, majority carrier conduction
- Low forward voltage, high efficiency
- Guarding for over voltage protection



TO-252 (D-PAK)

Mechanical Data

- Case: Epoxy, Molded
- Weight: 0.4grams(approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead Temperature for Soldering Purposes: 260°C Max. for 10 sec
- Shipped 2500 units per reel



Schematic Diagram

Maximum Ratings & Electrical Characteristics (T_A=25°C unless otherwise noted)

Parameter	Test Conditions	Symbol	Value	Unit
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	60	V
Working Peak Reverse Voltage		V _{RWM}	60	V
Maximum DC Blocking Voltage		V _{DC}	60	V
Maximum Vverage Forward Rectified Current at T _c =105°C Total Device per Diode		I _{F(AV)}	20 10	A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load per Diode		I _{FSM}	150	A
Voltage Rate of Change(rated V _R)		DV/dt	10000	V/us
Peak Repetitive Reverse Current per Leg at t _p =2.0us ,1KHz		I _{RRM}	1.0	A
Operating Junction Temperature Range		T _J	-55 to+150	°C
Storage Temperature Range		T _{STG}	-55 to+150	°C
Maximum Instantaneous Forward Voltage per Leg	I _F =10A T _c =25°C I _F =10A T _c =125°C	V _F	0.70 0.63	V
Maximum Reverse Current per Leg at Working Peak Reverse Voltage	T _J =25°C T _J =100°C	I _R	200 15	uA uA

Thermal Characteristics

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction to Case per Leg	R _{θJC}	4.0	°C/W
Thermal Resistance, Junction to Ambient per Leg	R _{θJA}	50	°C/W

Note: Pulse test:300us pulse width, duty cycle=2%

Typical Characteristics Curves

FIG.1- FORWARD CURRENT DERATING CURVE

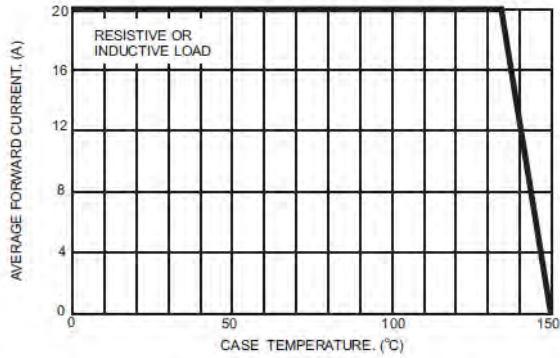


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

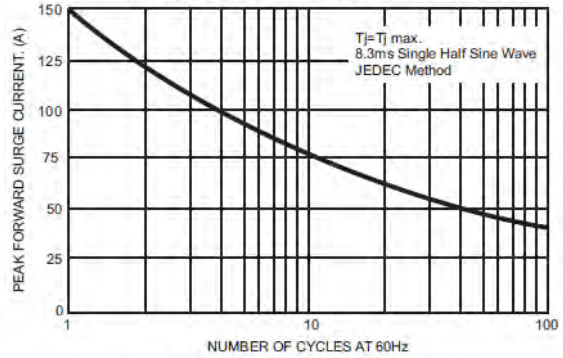


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER LEG

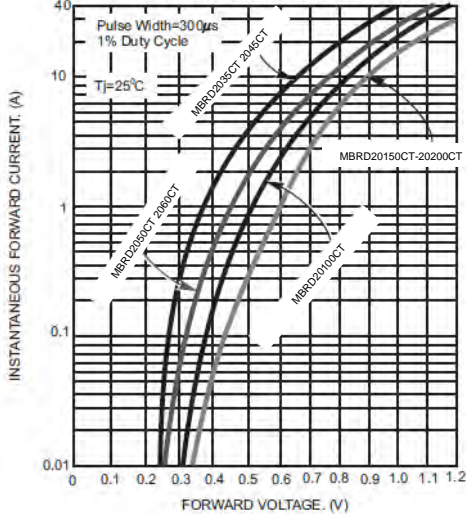


FIG.4- TYPICAL REVERSE CHARACTERISTICS PER LEG

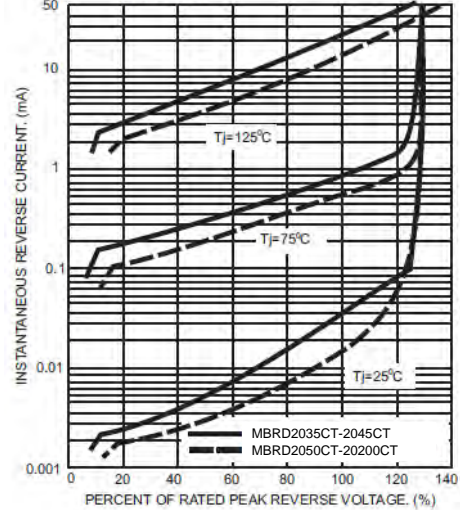


FIG.5- TYPICAL JUNCTION CAPACITANCE PER LEG


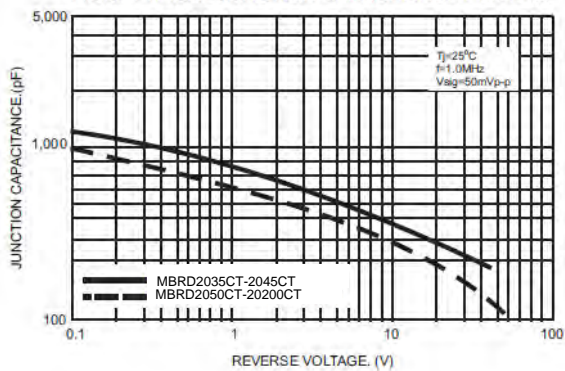


FIG.6- TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG



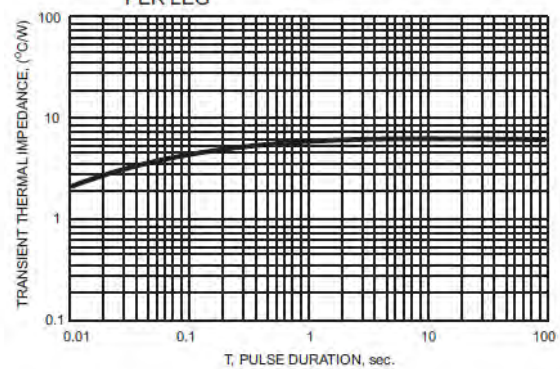

MBRD2060CT

Package Outline Dimensions

TO-252 (D-PAK)

