



Description

■ This device is an ultra low capacitance ESD product designed to protect very high speed data interfaces. PE15B-0402 has a typical I capacitance of only 0.05pf (I/O to GND), and it can be used to meet the ESD immunity requirements of IEC61000-4-2 (15KV air, 8KV contact discharge).



Feature

- ESD protection for high speed data lines to IEC61000-4-2
- ESD contact discharge typical 8KV, max 15KV
- ESD air discharge typical 15KV, max 25KV
- Surface mount
- Extremely low capacitance
- Very low leakage current
- Fast response time
- Bi-directional ESD protection
- Lead free solder termination
- The best ESD protection for high frequency, low voltage applications




Schematic Diagram

Application

- High Definition Multi-Media Interface (HDMI)
- Digital Visual Interface (DVI)
- Display Port Interface (DP)
- Unified Display Interface (UDI)
- Mobile Display Digital Interface (MDDI)
- Gigabit Ethernet
- USB2.0 and USB3.0
- IEEE1394 interface

Part Number System

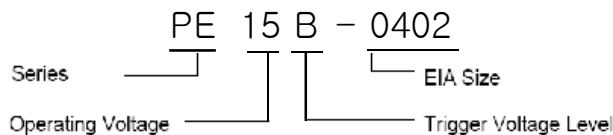

Order Information

| Device | Package | Carrier | Quantity | HSF Status |
|------------|---------|-------------|----------------|----------------|
| PE15B-0402 | 0402 | Tape & Reel | 10,000pcs/reel | RoHS compliant |

Absolute Maximum Ratings

| Parameter | Symbol | Value | Unit |
|--|-------------------|-------------|------|
| Maximum Contact discharge voltage Per IEC61000-4-2 | --- | 15KV | V |
| Maximum Air discharge voltage Per IEC61000-4-2 | --- | 25KV | V |
| Maximum Operating temperature | T _{OPER} | -55 to +125 | °C |
| Maximum Storage temperature | T _{STG} | -25 to +35 | °C |
| Maximum lead temperature for soldering during 10s | T _L | 260 | °C |


Electrical Characteristics(T_A=25°C)

| Parameter | Symbol | Test Conditions | Min | Typ | Max | Units |
|------------------|----------------|--------------------------------------|-----|------|------|-------|
| Rated Voltage | V _R | --- | --- | --- | 15 | V |
| Trigger voltage | V _T | IEC61000-4-2 8KV contact discharge | --- | 300 | --- | V |
| Clamping voltage | V _C | IEC61000-4-2 8KV contact discharge | --- | 35 | --- | V |
| Leakage current | I _L | DC 15V shall be applied on component | --- | 0.01 | 0.10 | uA |
| Capacitance | C _P | V _R = 0V, f = 1MHz | --- | 0.05 | | pF |



Note: 1. Trigger and clamping voltage are measured per IEC 61000-4-2, 8KV contact discharge method.

2. After reliability tests such as high temp storage, temp cycles, continuous ESD strike etc, the maximum leakage current is less than 10uA.


ESD Clamping Test

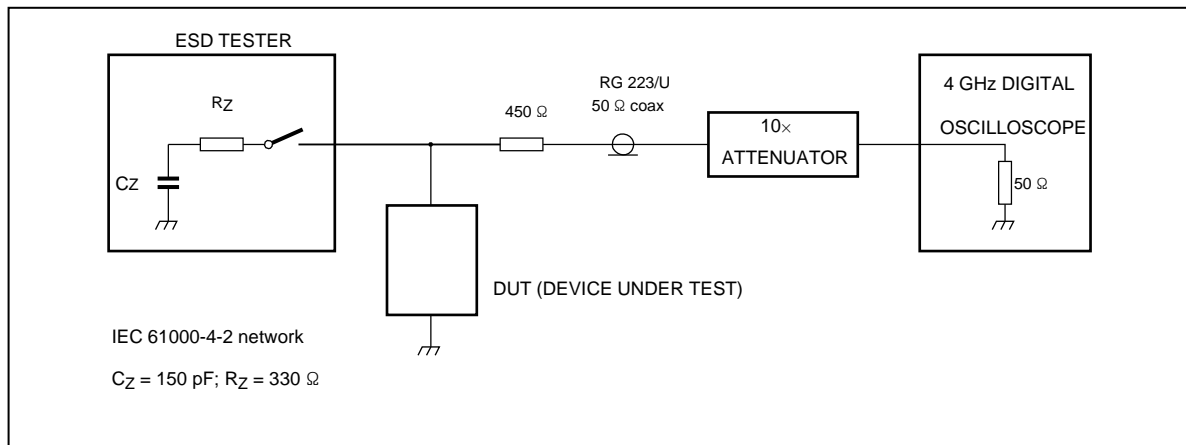

ESD Clamping Test Waveforms

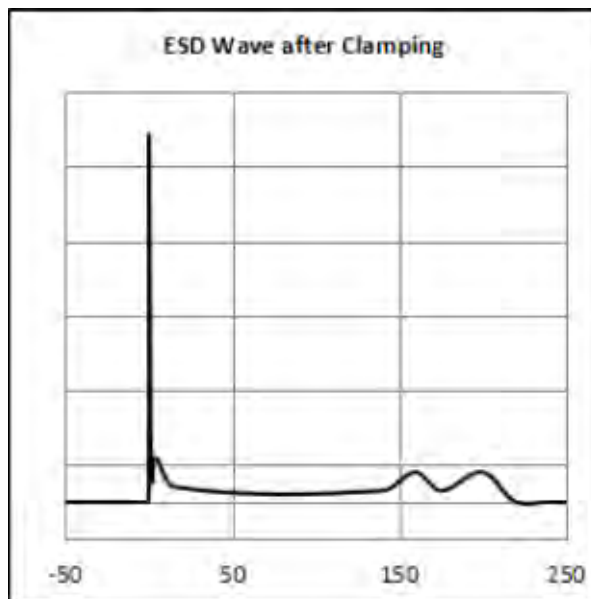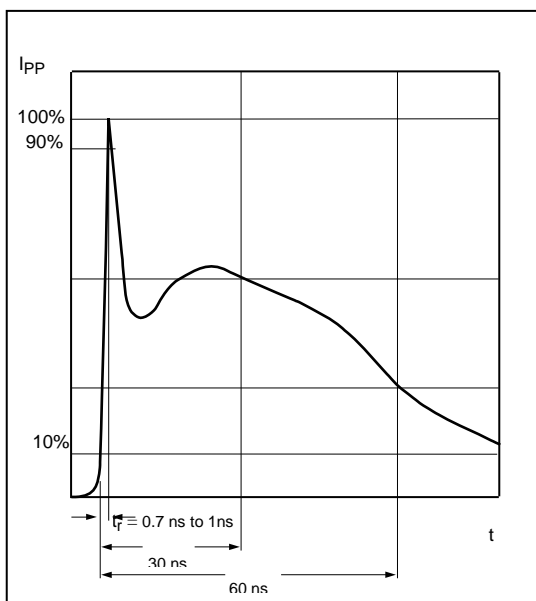


Product Dimension

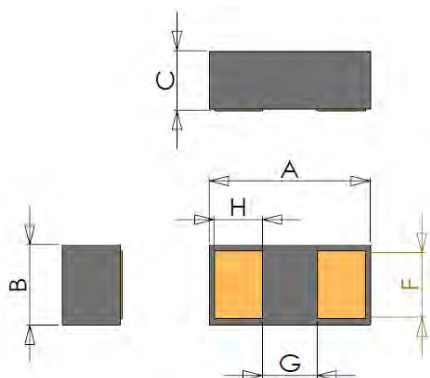

| Symbol | Dimension | | | Unit |
|--------|-----------|------|------|------|
| | Min | Typ | Max | |
| A | 0.95 | 1.0 | 1.05 | mm |
| B | 0.45 | 0.50 | 0.55 | |
| C | 0.32 | 0.36 | 0.40 | |
| H | 0.28 | 0.30 | 0.32 | |
| F | 0.41 | 0.43 | 0.45 | |
| G | 0.32 | 0.34 | 0.36 | |


PAD Dimension




| Symbol | Dimension | Unit |
|--------|-----------|------|
| A | 0.65 | mm |
| B | 0.50 | |
| C | 0.90 | |

Solder thickness 0.08 to 0.12mm


Solder Reflow Recommendations

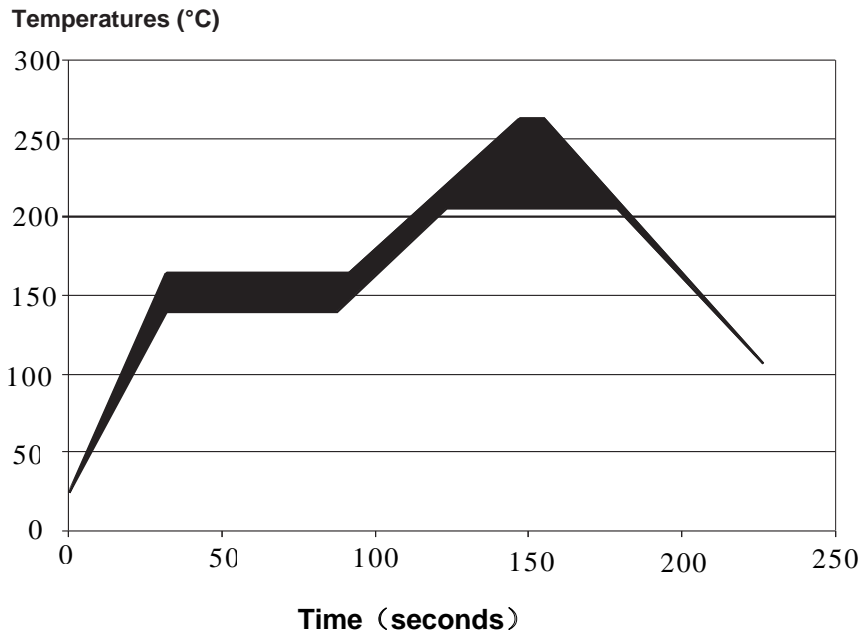

Package Information

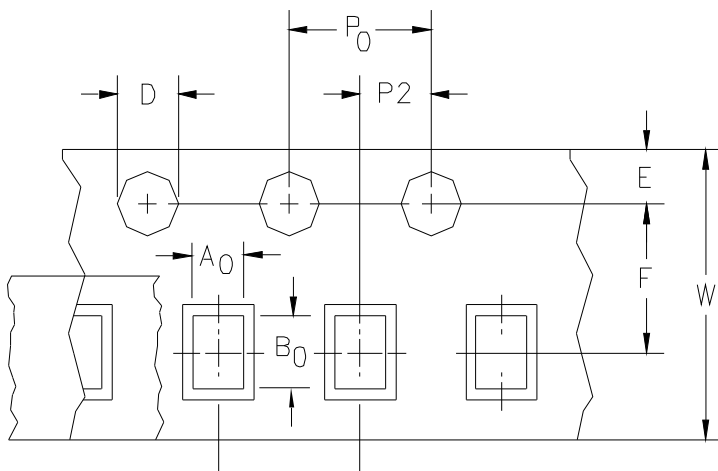

| Dimension | Typical | Unit |
|-----------|---------|------|
| A0 | 0.68 | mm |
| B0 | 1.17 | |
| D | 1.55 | |
| P0 | 4.00 | |
| P1 | 2.00 | |
| P2 | 2.00 | |
| E | 1.75 | |
| F | 3.50 | |
| W | 8.00 | |

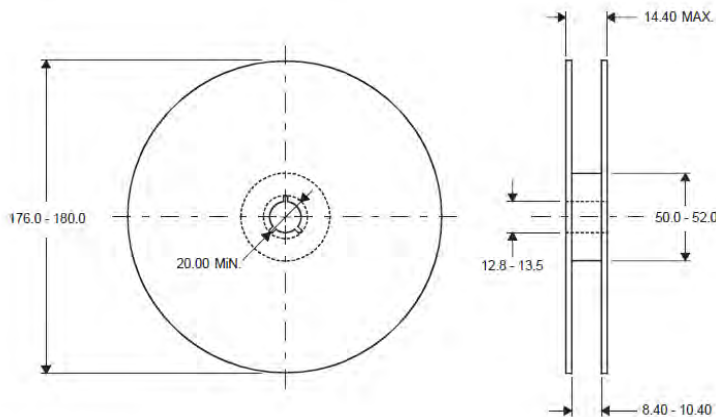

DIMENSIONS ARE: MILLIMETERS