

## Bidirectional TVS Diodes

### DESCRIPTION


The SD03C ~ SD36C Series is designed for applications requiring transient overvoltage protection capability. They are intended for use in voltage and ESD sensitive equipment such as computers, printers, business machines, communication systems, medical equipment and other applications. These devices are ideal for situations where board space is at a premium.

This series has been specifically designed to protect sensitive components which are connected to power, data and transmission lines from overvoltage caused by ESD (electrostatic discharge), CDE (Cable Discharge Events), and EFT (electrical fast transients).

### ORDERING INFORMATION

- ✧ Device: SD03C ~ SD36C
- ✧ Package: SOD-323
- ✧ Material: Halogen free
- ✧ Packing: Tape & Reel
- ✧ Quantity per reel: 3,000pcs

### PIN CONFIGURATION



### FEATURES

- ✧ IEC61000-4-2 (ESD)  $\pm 15\text{kV}$  (air),  $\pm 8\text{kV}$  (contact)
- ✧ IEC61000-4-4 (EFT) 40A (5/50ns)
- ✧ 350 Watts Peak Pulse Power per (tp=8/20µs)
- ✧ Protects one I/O line (bidirectional)
- ✧ Low clamping voltage
- ✧ Working voltages :3V,5V,8V,12V,15V,18V,24V, 36V
- ✧ Low leakage current

### MACHANICAL DATA

- ✧ SOD-323 package
- ✧ Flammability Rating: UL 94V-0
- ✧ Packaging: Tape and Reel
- ✧ High temperature soldering guaranteed:260°C/10s
- ✧ Reel size: 7 inch
- ✧ MSL 1

### APPLICATIONS

- ✧ Cell Phone Handsets and Accessories
- ✧ Microprocessor based equipment
- ✧ Personal Digital Assistants (PDA's)
- ✧ Notebooks, Desktops, and Servers
- ✧ Portable Instrumentation
- ✧ Networking and Telecom
- ✧ Serial and Parallel Ports.
- ✧ Peripherals

### PACKAGE OUTLINE





# SD03C ~ SD36C

## Bidirectional TVS Diodes

ABSOLUTE MAXIMUM RATING			
Symbol	Parameter	Value	Units
$V_{ESD}$	ESD per IEC 61000-4-2 (Air)	$\pm 15$	kV
	E -4-2 (Contact)	$\pm 8$	
$P_{PP}$	Peak Pulse Power (8/20 $\mu$ s)	350	W
$T_{OPT}$	Operating Temperature	-55/+150	$^{\circ}$ C
$T_{STG}$	Storage Temperature	-55/+150	$^{\circ}$ C
$T_L$	Lead Soldering Temperature	260 (10 sec.)	$^{\circ}$ C


ELECTRICAL CHARACTERISTICS ( $T_{amb}=25^{\circ}$ C)									
PART NUMBER	DEVICE MARKING	$V_{RWM}$	$V_B$	$I_T$	$V_C@1A$	$V_C$		$I_R$	$C_T$
		(V) (max.)	(V) (min.)	(mA)	(V) (max.)	(V) (max. (@A))		( $\mu$ A) (max.)	(pF) (max.)
SD03C	03B	3.3	4.0	1	7.5	13.0	20	40	450
SD05C	05B	5.0	6.0	1	9.8	18.0	17	10	200
SD08C	08B	8.0	8.5	1	13.4	24.0	15	2	120
SD12C	12C	12.0	13.3	1	19.0	32.0	11	1	75
SD15C	15B	15.0	16.7	1	24.0	38.0	10	1	68
SD18C	18B	18.0	20.0	1	29.0	45.0	9	1	57
SD24C	24B	24.0	26.7	1	43.0	52.0	7	1	50
SD36C	36B	36.0	40.0	1	60.0	75.0	5	1	35




# SD03C ~ SD36C

## Bidirectional TVS Diodes


### ELECTRICAL CHARACTERISTICS CURVE

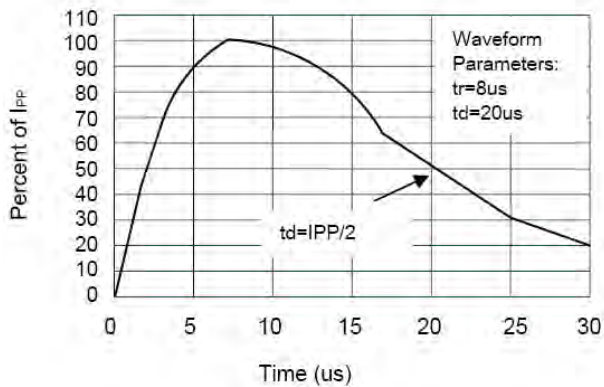


Pulse Waveform

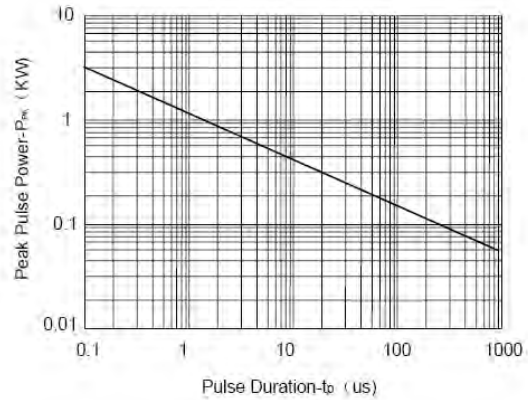

Non-Repetitive Peak Pulse Power vs. Pulse Time

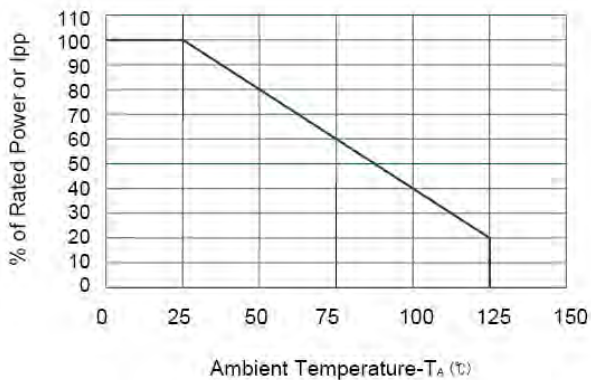



Power Derating Curve

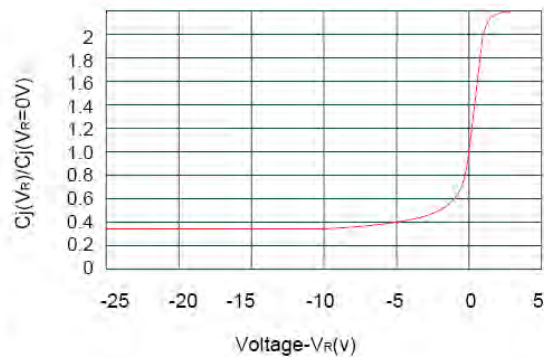


Junction Capacitance vs. Reverse Voltage

## Bidirectional TVS Diodes

### SOD-323 PACKAGE OUTLINE DIMENSIONS

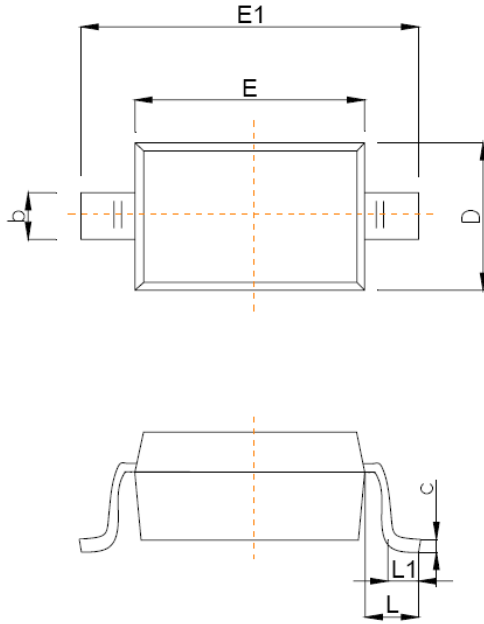

Symbol	Dimensions In Millimeters	
	Min	Max
A		1.00
A1	0.000	0.100
A2	0.800	0.900
b	0.250	0.350
c	0.080	0.150
D	1.200	1.400
E	1.600	1.800
E1	2.500	2.700
e	1.800	2.040
L	0.475 REF	
L1	0.250	0.400
$\theta$	0°	8°

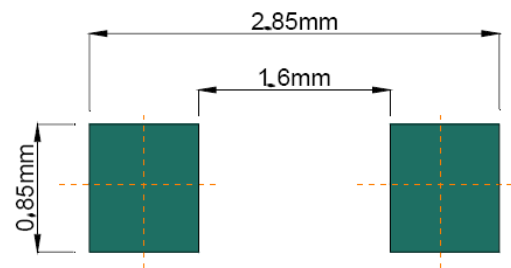

**Recommended Pad outline**