

## 1.5A SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIER

### FEATURES:


- Glass Passivated Chip Junction
- Reverse Voltage - 100 to 1000 V
- Forward Current - 1.5 A
- Fast reverse recovery time
- Designed for Surface Mount Application

### MECHANICAL DATA

- Case: ABS/LBF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 88mg 0.0031oz

### PINNING

PIN	DESCRIPTION
1	Input Pin ( ~ )
2	Input Pin ( ~ )
3	Output Anode ( + )
4	Output Cathode ( - )

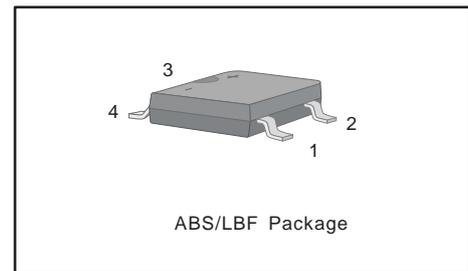

### Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	FTB1S-15	FTB2S-15	FTB4S-15	FTB6S-15	FTB8S-15	FTB10S-15	Units
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	100	200	400	600	800	1000	V
Average Rectified Output Current at $T_c = 125\text{ }^\circ\text{C}$	$I_O$	1.5						A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	$I_{FSM}$	50						A
Maximum Forward Voltage at 1.5 A	$V_F$	1.3						V
Maximum DC Reverse Current $T_a = 25\text{ }^\circ\text{C}$ at Rated DC Blocking Voltage $T_a = 125\text{ }^\circ\text{C}$	$I_R$	5.0 100						$\mu\text{A}$
Typical Junction Capacitance ( Note1 )	$C_j$	30						pF
Typical Thermal Resistance ( Note2 )	$R_{\theta JA}$	65 16						$^\circ\text{C/W}$
Maximum Reverse Recovery Time ( Note3 )	$t_{rr}$	200						ns
Operating and Storage Temperature Range	$T_j, T_{stg}$	-55 ~ +150						$^\circ\text{C}$

Note:1. Measured at 1 MHz and applied reverse voltage of 4 V D.C


2. Mounted on glass epoxy PC board with 4×1.5"×1.5" ( 3.81×3.81 cm ) copper pad.

3. Measured with  $I_F = 0.5\text{ A}$ ,  $I_R = 1\text{ A}$ ,  $I_{rr} = 0.25\text{ A}$ .




# FTB1S-15 ~ FTB10S-15


**Fig.1 Average Rectified Output Current Derating Curve**

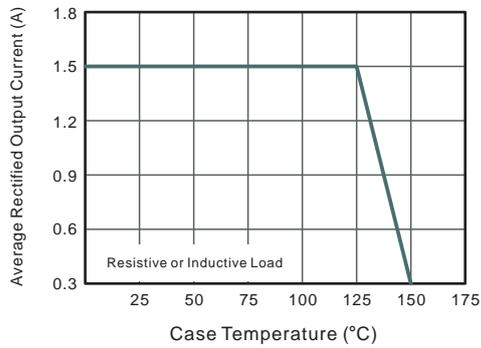


**Fig.2 Typical Reverse Characteristics**

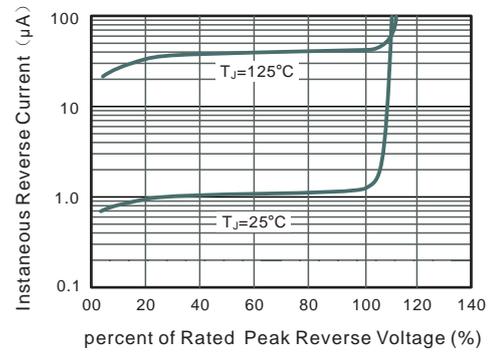


**Fig.3 Typical Instantaneous Forward Characteristics**

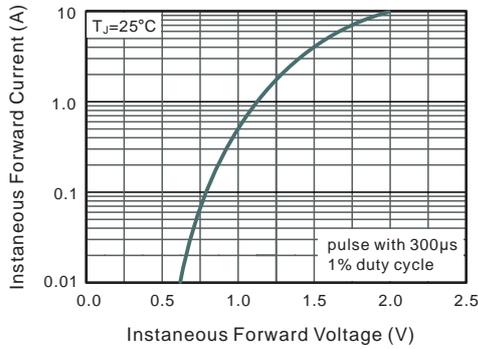

**Fig.4 Typical Junction Capacitance**

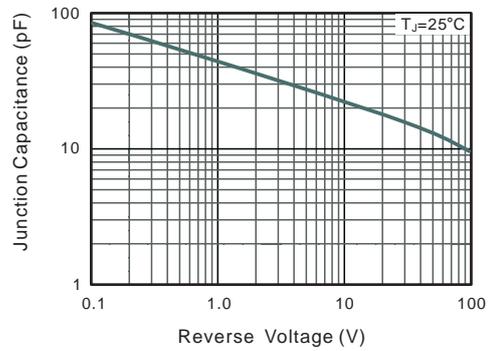


**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

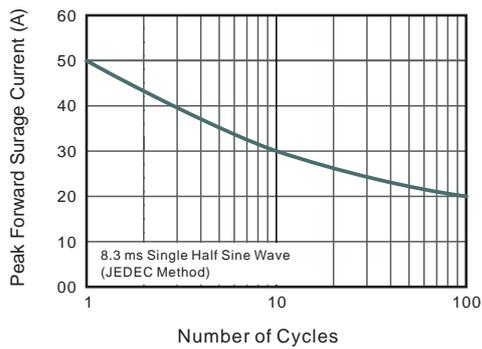


## PACKAGE OUTLINE

Plastic surface mounted package; 4 leads

ABS/LBF

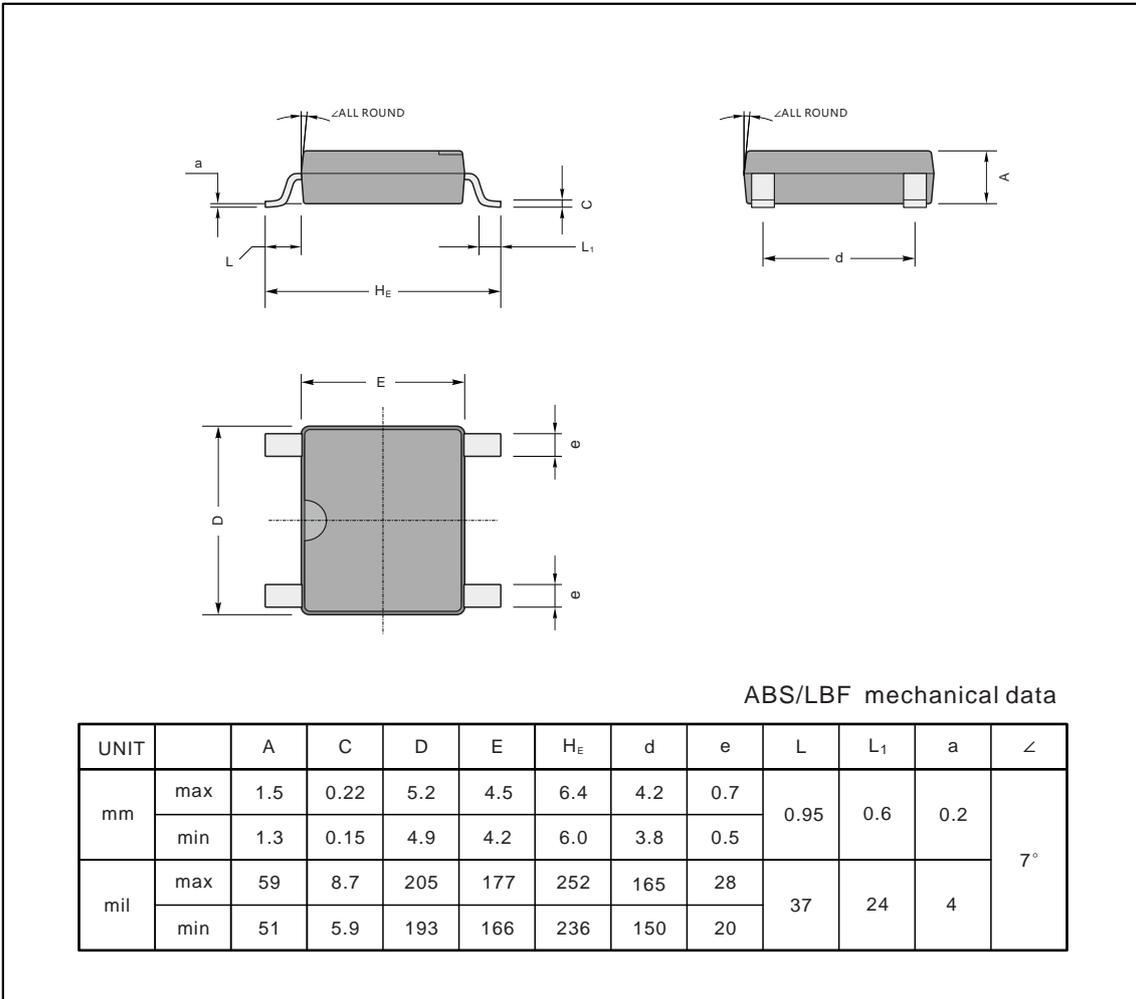

### The recommended mounting pad size

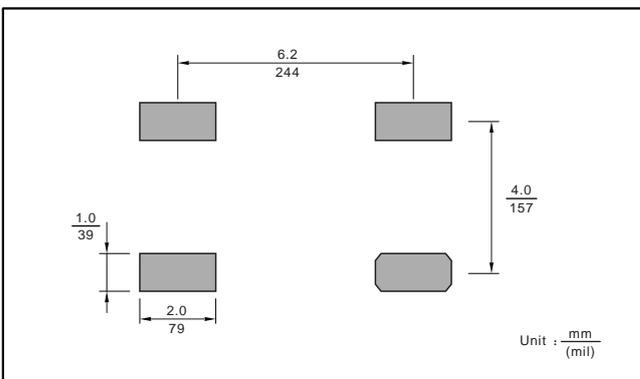

### Marking

Type number	Marking code
FTB1S-15	F15T01
FTB2S-15	F15T02
FTB4S-15	F15T04
FTB6S-15	F15T06
FTB8S-15	F15T08
FTB10S-15	F15T10